




# 10. Network models

## Contents

- Circuit switched network modelled as a loss network
- Packet switched network modelled as a queueing network


## Teletraffic model of a circuit switched network (1)

- Consider a circuit switched network
  - e.g. a telephone network
- Traffic:
  - telephone calls
  - each (carried) call occupies one channel on each link among its route
- System:
  - telephone machines (terminals)
  - exchanges (network nodes)
  - access links (from terminals to exchanges)
  - trunks (between exchanges)

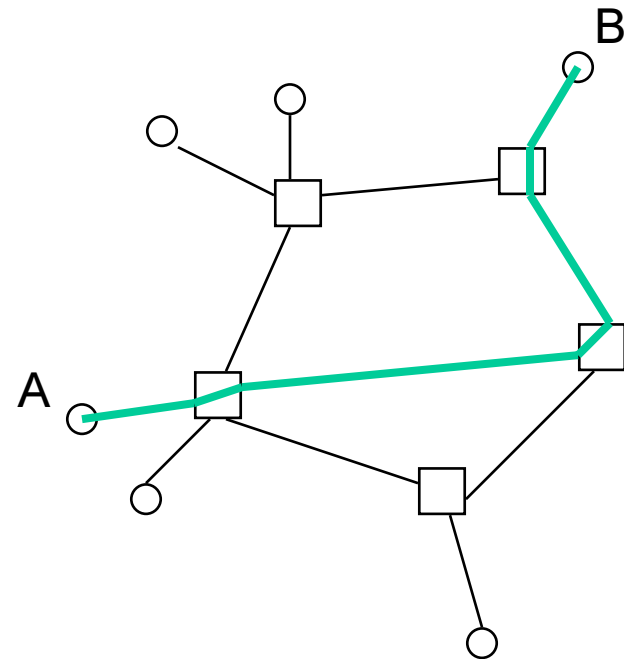


## Teletraffic model of a circuit switched network (2)

- Quality of service:
  - described by the **end-to-end call blocking probability** (prob. that a desired connection cannot be set up due to congestion along the route of the connection)
- In our model we assume that
  - the network nodes and the whole access network are non-blocking
- Thus, a call is blocked
  - if and only if all channels are occupied in any trunk network link along the route of that call

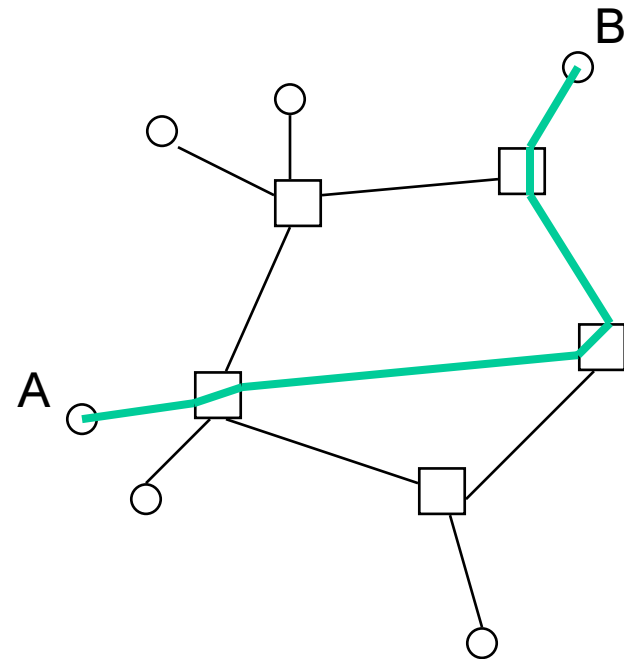


## Links $j = 1, \dots, J$

- In our model,
  - all links are **two-way** (why?)
- We index the links in the trunk network by
  - $j = 1, \dots, J$
  - example on the right:  $J = 6$
- Let  $n_j$  denote the number of channels in link  $j$  (that is: the link capacity)
  - $\mathbf{n} = (n_1, \dots, n_J)$
- Each link is modelled as a
  - **pure loss system**

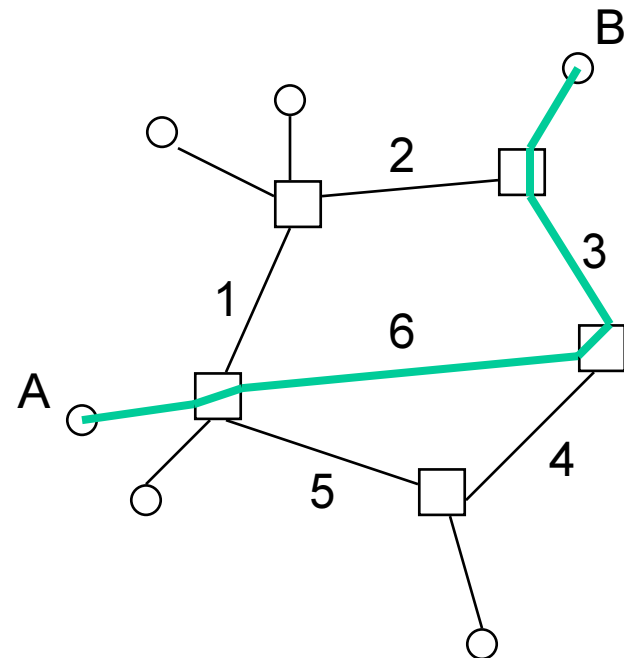


## Routes $r = 1, \dots, R$

- We define a **route** as a
  - set of consecutive (two-way) links connecting two network nodes
- We index the routes by
  - $r = 1, \dots, R$
- In the example on the right:
  - $R = 12 + 10 + 7 + 3 = 32$
  - there are three routes **between** nodes a and b:  $\{1,2\}$ ,  $\{6,3\}$ ,  $\{5,4,3\}$
- Let  $d_{jr} = 1$  if link  $j$  belongs to route  $r$  (otherwise  $d_{jr} = 0$ )
  - $\mathbf{D} = (d_{jr} \mid j = 1, \dots, J; r = 1, \dots, R)$

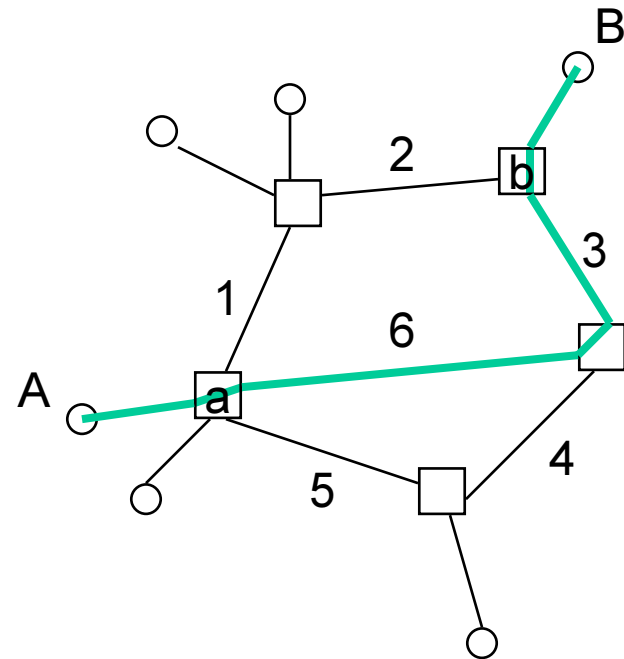

## Traffic classes

- Note:
  - End-to-end call blocking prob. is equal for all the connections following the same route
- Thus the **traffic class** of a connection is determined by the route  $r$  the connection follows
  - Example on the right: connection between A and B belongs to class using route  $\{6,3\}$
- Let  $x_r$  denote the number of active connections following route  $r$ 
  - $\mathbf{x} = (x_1, \dots, x_R)$
- Vector  $\mathbf{x}$  is called the **state** of the system

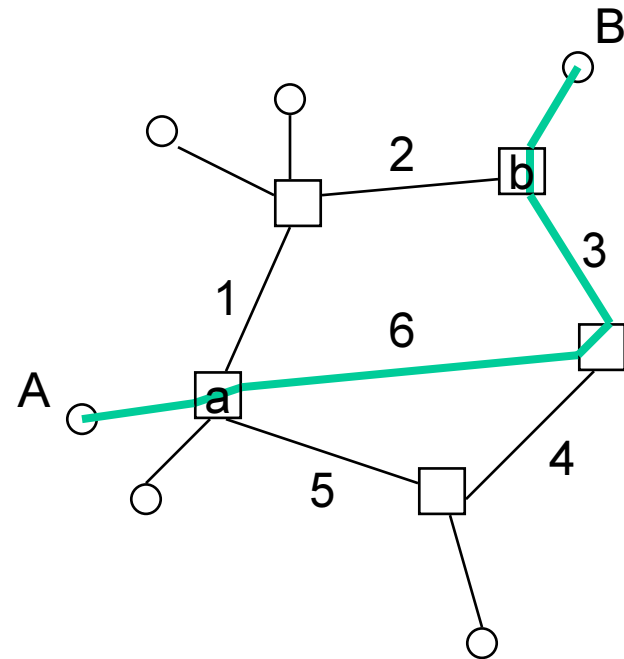

## State space

- The number of active connections  $x_r$  for any traffic class  $r$  is limited by the link capacities  $n_j$  along the corresponding route  $r$  :

$$\sum_{r=1}^R d_{jr} x_r \leq n_j \quad \text{for all } j$$

- The same in vector form:

$$\mathbf{D} \cdot \mathbf{x} \leq \mathbf{n}$$

- Thus, the **state space**  $S$  (that is: the set of **admissible** states) is


$$S = \{\mathbf{x} \geq 0 \mid \mathbf{D} \cdot \mathbf{x} \leq \mathbf{n}\}$$

- Note that, due to finite link capacities, set  $S$  is **finite**



## Example

- 3 links with capacities:
  - link a-c: 3 channels
  - link b-c: 3 channels
  - link c-d: 4 channels
- 2 routes:
  - route a-c-d
  - route b-c-d
  - The other 4 routes (which?) are ignored in this model
- State space:
  - $S = \{(0,0), (0,1), (0,2), (0,3), (1,0), (1,1), (1,2), (1,3), (2,0), (2,1), (2,2), (3,0), (3,1)\}$

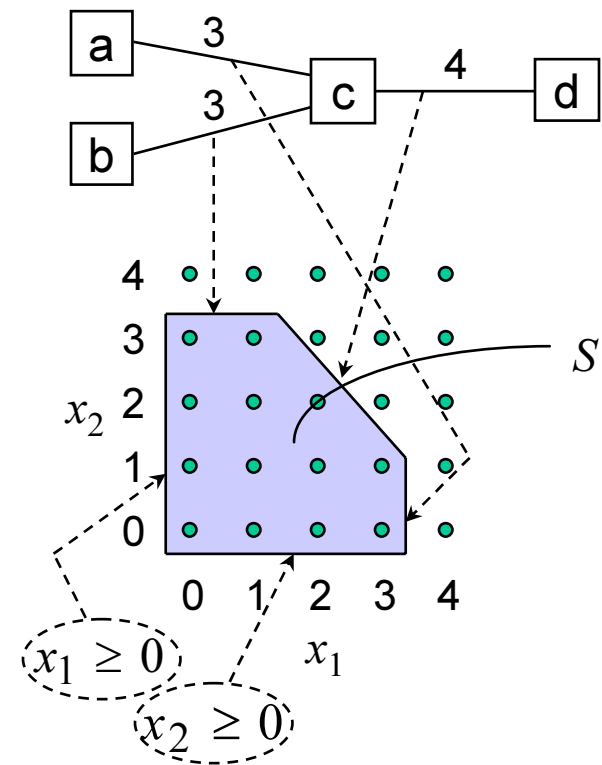

## Set $S_r$ of non-blocking states for class $r$

- Consider
  - an arriving call belonging to class  $r$  (that is: following route  $r$ )
- It will **not** be blocked by link  $j$  belonging to route  $r$ 
  - if there is at least one free channel on link  $j$ :

$$\sum_{r'=1}^R d_{jr'} x_{r'} \leq n_j - 1 \quad \text{for all } j \in r$$

- The same in vector form ( $\mathbf{e}_r$  being here the unit vector in direction  $r$ ):

$$\mathbf{D} \cdot (\mathbf{x} + \mathbf{e}_r) \leq \mathbf{n}$$

- The set  $S_r$  of **non-blocking** states for class  $r$  is thus


$$S_r = \{\mathbf{x} \geq 0 \mid \mathbf{D} \cdot (\mathbf{x} + \mathbf{e}_r) \leq \mathbf{n}\}$$

## Set $S_r^B$ of blocking states for class $r$

- The set  $S_r^B$  of **blocking** states for class  $r$  is clearly:

$$S_r^B = S \setminus S_r$$

- Summary:
  - an arriving call of class  $r$  is blocked (and lost) if and only if the state  $x$  of the system belongs to set  $S_r^B$
- Example (continued):
  - The blocking states  $S_1^B$  for connections of class 1 (using route a-c-d) are circled in the figure
  - $S_1^B = \{ (1,3), (2,2), (3,0), (3,1) \}$

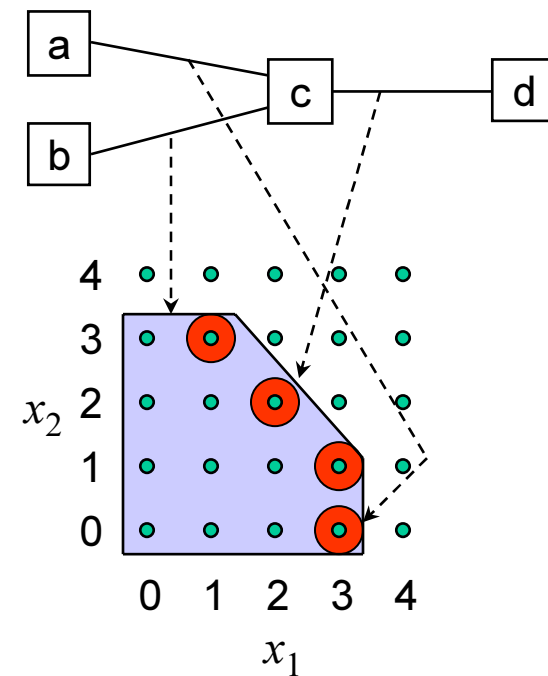

## Loss network

- Assume that
  - new connection requests belonging to traffic class  $r$  arrive (independently) according to a Poisson process with intensity  $\lambda_r$
  - call holding times independently and identically distributed with mean  $h$
- Denote
  - $a_r = \lambda_r h$  (traffic intensity for class  $r$ )

## Equilibrium distribution (1)

- Then it is possible to show that
  - the stationary state probability  $\pi(\mathbf{x})$  for any state  $\mathbf{x} \in S$  is as follows:

$$\pi(\mathbf{x}) = G^{-1} \cdot \prod_{r=1}^R f_r(x_r)$$

where  $G$  is a normalizing constant:

$$G = \sum_{\mathbf{x} \in S} \prod_{r=1}^R f_r(x_r)$$

and the functions  $f_r(x_r)$  are defined as follows:

$$f_r(x_r) = \frac{a_r^{x_r}}{x_r!}$$

## Equilibrium distribution (2)

- Probability  $\pi(\mathbf{x})$  is said to be of **product-form**
  - However, the number of active connections of different classes are **not** independent (since the normalizing constant  $G$  depends on each  $x_r$ )
  - Only if all the links had infinite capacities, all the traffic classes would be independent of each other
  - Thus, it is the limited resources shared by the traffic classes that makes them dependent on each other

## PASTA

- Consider, for a while,
  - any simple teletraffic model with Poisson arrivals
- According to so called **PASTA** (Poisson Arrivals See Time Averages) property,
  - arriving calls (obeying a Poisson process) see the system in equilibrium
- This is an important observation
  - applicable in many problems
- For example,
  - it allows us to calculate the end-to-end blocking probabilities in our circuit switched network model (since we assumed that new calls arrive according to a Poisson process)

## End-to-end blocking: exact formula

- The probability that the system is in a state such that it cannot accept any more connections of type  $r$  is clearly given by the sum

$$\sum_{\mathbf{x} \in S_r^B} \pi(\mathbf{x})$$

- Call this the end-to-end **time blocking** probability for class  $r$
- Due to the PASTA property,
  - the end-to-end **call blocking** probability  $B_r$  equals this:

$$B_r = \sum_{\mathbf{x} \in S_r^B} \pi(\mathbf{x})$$

- Since there is no difference between time and call blocking in this case, we may briefly call it **end-to-end blocking**.



## Example

- Consider the example presented in slide 9 (and continued in slide 11)
- The end-to-end blocking probability  $B_1$  for class 1 will be

$$B_1 = \pi(1,3) + \pi(2,2) + \pi(3,0) + \pi(3,1) =$$

$$\frac{a_1^1 a_2^3}{1!3!} + \frac{a_1^2 a_2^2}{2!2!} + \frac{a_1^3}{3!} \left( 1 + \frac{a_2^1}{1!} \right)$$

$$\left( 1 + \frac{a_2^1}{1!} + \frac{a_2^2}{2!} + \frac{a_2^3}{3!} \right) + \frac{a_1^1}{1!} \left( 1 + \frac{a_2^1}{1!} + \frac{a_2^2}{2!} + \frac{a_2^3}{3!} \right) + \frac{a_1^2}{2!} \left( 1 + \frac{a_2^1}{1!} + \frac{a_2^2}{2!} \right) + \frac{a_1^3}{3!} \left( 1 + \frac{a_2^1}{1!} \right)$$

## Approximative methods

- In practice,
  - it is extremely hard (even impossible) to apply the exact formula
  - This is due to the so called **state space explosion**:  
there are as many **dimensions** in the state spaces as  
there are routes in our model  
⇒ exponential growth of the state space
- Thus, **approximative** methods are needed
  - Below we will present (the simplest) one of them: product bound
- **Product Bound** method
  - estimate first blocking probabilities in each separate link  
(common to all traffic classes)
  - calculate then the end-to-end blocking probabilities for each class  
based on the hypothesis that “blocking occurs independently in each link”

## Product Bound (1)

- Consider first the blocking probability  $B(j)$  in an arbitrary link  $j$ 
  - Let  $R(j)$  denote the set of routes that use link  $j$
- If the capacities of all the other links (but  $j$ ) were infinite,
  - link  $j$  could be modelled as a loss system where new calls arrive according to a Poisson process with intensity  $\lambda(j)$ ,

$$\lambda(j) = \sum_{r \in R(j)} \lambda_r$$

- In this case, the blocking probability could be calculated from formula

$$B(j) \approx \text{Erl}(n_j, \sum_{r \in R(j)} a_r)$$

- Note that this is really an approximation, since the traffic offered to link  $j$  is smaller due to blockings in other links (and not even of Poisson type).

## Product Bound (2)

- Consider then the **end-to-end blocking** probability  $B_r$  for class  $r$ 
  - Let  $J(r)$  denote the set of the links that belong to route  $r$
  - Note that an arriving call of class  $r$  will not be blocked, if it is not blocked in any link  $j \in J(r)$
- If blocking occurred independently in each link,
  - an arriving call of class  $r$  would be blocked with probability

$$B_r \approx 1 - \prod_{j \in J(r)} (1 - B(j))$$

- Note that for small values of  $B(j)$ 's, we can use the following approximation:


$$B_r \approx \sum_{j \in J(r)} B(j)$$

## Contents

- Circuit switched network modelled as a loss network
- Packet switched network modelled as a queueing network


## Teletraffic model of a packet switched network (1)

- Consider a connectionless packet switched network **at packet level**
  - e.g. an Internet subnetwork
- Traffic:
  - data packets
  - identified by their source (A) and destination (B)
- System:
  - workstations & servers (terminals)
  - routers (network nodes)
  - access links (from terminals to routers)
  - trunks (between routers)

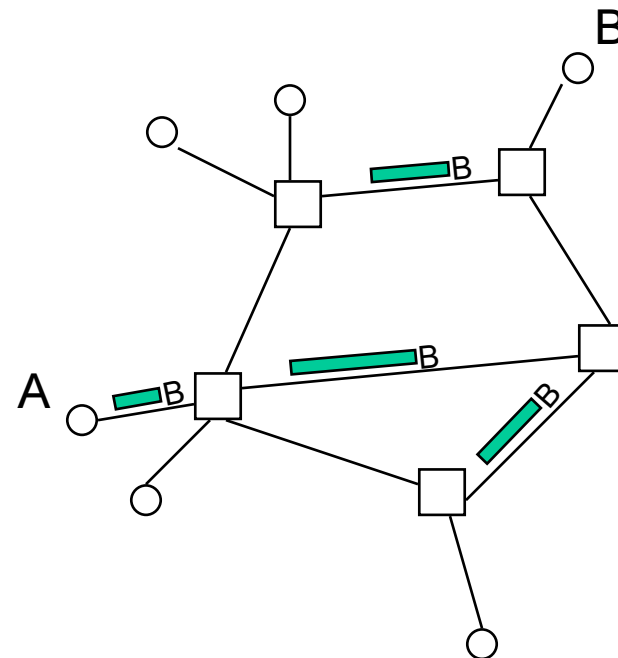

## Teletraffic model of a packet switched network (2)

- Quality of service:
  - described by the **average end-to-end packet delay** (the mean time for a packet to get from the source (A) to the destination (B))
- However, in our model
  - we restrict ourselves to the **average trunk network delay** (the mean time for a packet to get from the source router (a) to the destination router (b))
  - implicitly, we assume that the delay due to access network is negligible (or, at least, almost deterministic)

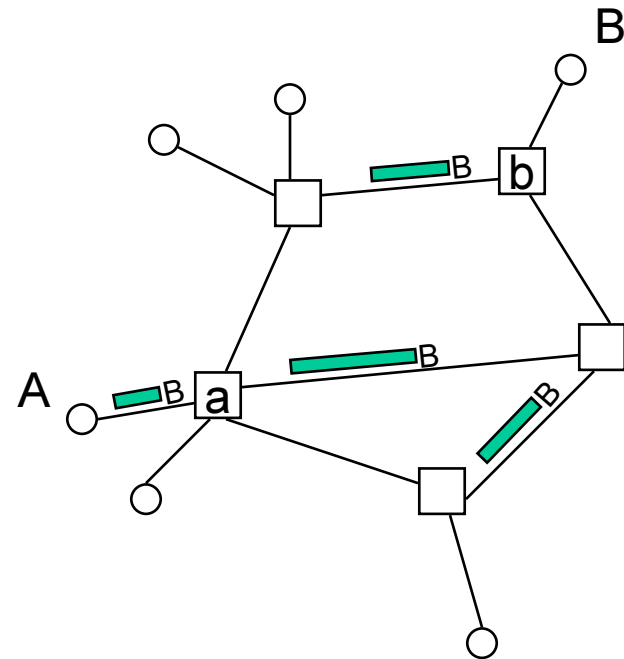


## End-to-end delay components

- Trunk network delay consists of
  - **propagation delays** (in links)
  - **transmission delays** (in links)
  - **processing delays** (in nodes)
  - **queueing delays** (before transmission and before processing)
- Note that
  - propagation and transmission delays are deterministic,
  - processing delays might be random, and
  - queueing delays are surely random
- In our model,
  - we will take into account the transmission and the related queueing delays
  - but we will ignore the propagation delays in links and the delays in nodes (the processing and the related queueing delays)




## Links $j = 1, \dots, J$

- In this case we separate the directions so that
  - all links are **one-way** (why?)
- We index the links in the trunk network by
  - $j = 1, \dots, J$
  - example on the right:  $J = 12$
- Let  $C_j$  denote the capacity of link  $j$  (in bps)

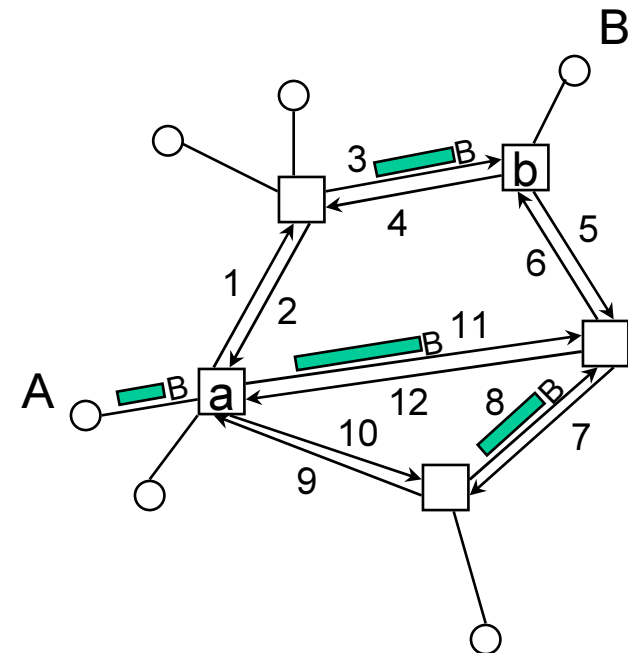


## Routes $r = 1, \dots, R$

- We define here a **route** as an
  - ordered set of consecutive (one-way) links connecting two network nodes (called origin and destination)
- We index the routes by
  - $r = 1, \dots, R$
- In the example on the right:
  - $R = 2*(12+10+7+3) = 64$
  - there are three routes **from** node a **to** node b: (1,3), (11,6), (10,8,6)
  - for these routes, node a is the origin and node b is the destination

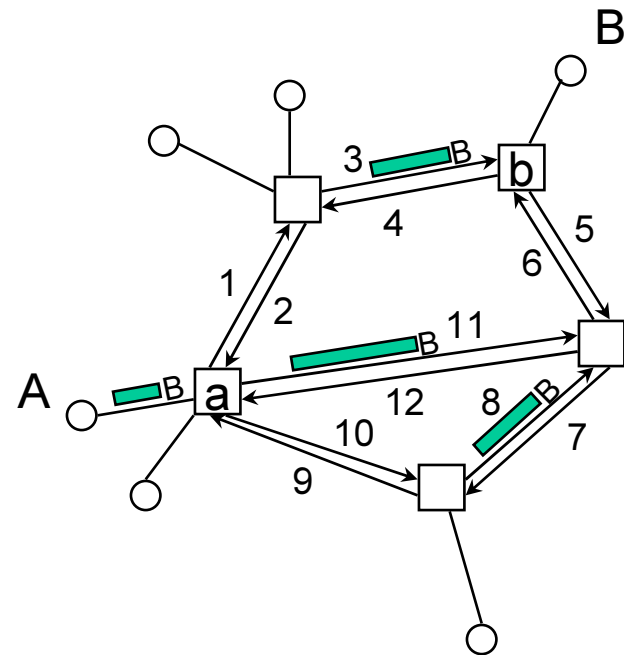

## Individual link model

- Each link is modelled as a
  - **pure waiting system** (with a single server and an infinite buffer)
- Let
  - $\lambda_j$  = arrival rate of packets to be transmitted on link  $j$  (in packets/s)
  - $L$  = mean packet length (in bits)
  - $1/\mu_j = L/C_j$  = average packet transmission time on link  $j$  (in seconds)
- Stability requirement:  $\lambda_j < \mu_j$

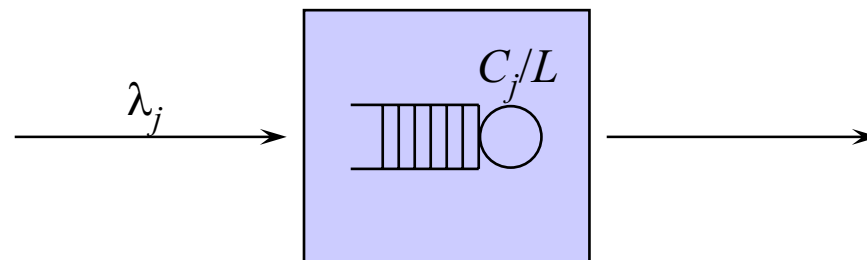


## Packet arrival rates in links

- Let
  - $\lambda(r)$  = arrival rate of packets following route  $r$
  - $R(j)$  = the set of routes that use link  $j$ 
    - can be deduced from the routing tables
- It follows that the arrival rate for link  $j$  is as follows:

$$\lambda_j = \sum_{r \in R(j)} \lambda(r)$$

## Traffic classes

- Note:
  - Average end-to-end delay is equal for all the packets following the same route
- Thus,
  - the **traffic class** of a packet is determined by the route  $r$  that the connection follows

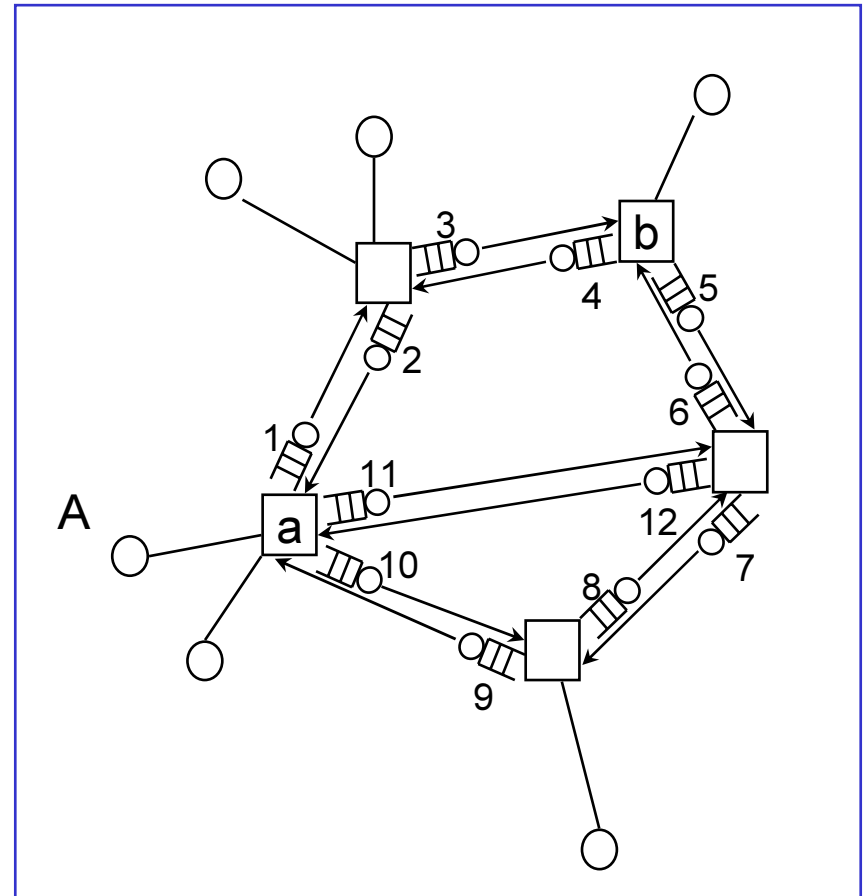

## State space


- Let  $x_j$  = denote the number of packets in queue  $j$  (including the packet being transmitted (if any))
  - $\mathbf{x} = (x_1, \dots, x_J)$
- Vector  $\mathbf{x}$  is called the **state** of the system
  - A more detailed state description (including the position and traffic class of each packet in the whole system) is not needed under the assumptions that we will make later!
- In this case,  $x_j$  can have any non-negative value
- Thus, the **state space**  $S$  is

$$S = \{\mathbf{x} \geq 0\}$$

- Note that, set  $S$  is now **infinite**

## Example

- 2 links:
  - link a-b
  - link b-c
- 3 routes:
  - route a-b
  - route b-c
  - route a-b-c
- State space:
  - $S = \{(0,0), (1,0), (0,1), (2,0), (1,1), (0,2), (3,0), (2,1), (1,2), (0,3), \dots\}$

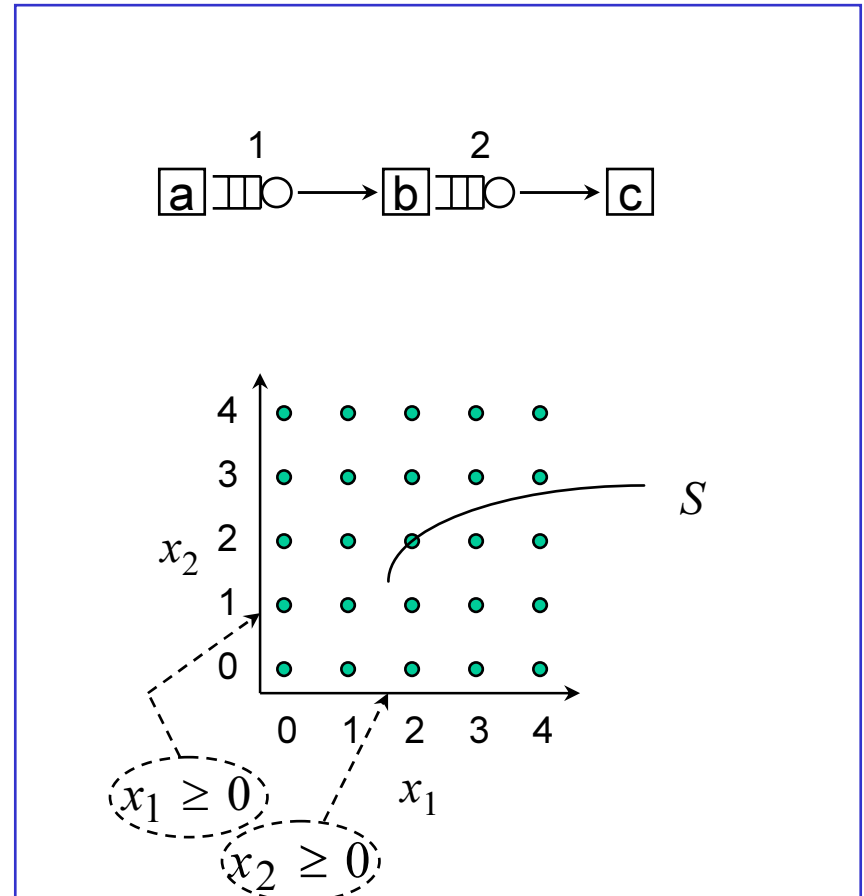

## Queueing network

- Assume that
  - new packets following route  $r$  arrive (independently) according to a Poisson process with intensity  $\lambda(r)$
  - packet lengths are independently and exponentially distributed with mean  $L$
- It follows that
  - new packets to be transmitted on link  $j$  arrive (independently) according to a Poisson process with intensity  $\lambda_j$ , where

$$\lambda_j = \sum_{r \in R(j)} \lambda(r)$$

- packet transmission times are independently and exponentially distributed with mean  $1/\mu_j = L/C_j$



## Equilibrium distribution (1)

- Assume further that
  - the system is **stable**:  $\lambda_j < \mu_j$  for all  $j$
  - packet length is independently redrawn (from the same distribution) every time the packet moves from one link to another
    - This is so called **Kleinrock's independence assumption**
- Under these assumptions, it is possible to show that
  - the stationary state probability  $\pi(\mathbf{x})$  for any state  $\mathbf{x} \in \mathcal{S}$  is as follows:

$$\pi(\mathbf{x}) = \prod_{j=1}^J (1 - \rho_j) \rho_j^{x_j}$$

- where  $\rho_j$  denotes the traffic load of link  $j$ :

$$\rho_j = \frac{\lambda_j}{\mu_j} = \frac{\lambda_j L}{C_j} < 1$$

## Equilibrium distribution (2)

- Probability  $\pi(\mathbf{x})$  is again said to be of **product-form**
  - Now, the number of packets in different queues are **independent** (why?)
- Each individual queue  $j$  behaves as an M/M/1 queue
  - Number of packets in queue  $j$  follows a geometric distribution with mean

$$\bar{X}_j = \frac{\rho_j}{1 - \rho_j}$$

## Mean end-to-end delay

- Consider then the mean end-to-end delay for class  $r$ 
  - Let  $J(r)$  denote the set of the links that belong to route  $r$
- In our model, the mean end-to-end delay will be
  - the sum of mean delays experienced in the links along the route (including **both** the transmission delay **and** the queueing delay)
- By Little's formula, the mean link delay is

$$\bar{T}_j = \frac{\bar{X}_j}{\lambda_j} = \frac{1}{\lambda_j} \cdot \frac{\rho_j}{1 - \rho_j} = \frac{1}{\mu_j} \cdot \frac{1}{1 - \rho_j} = \frac{1}{\mu_j - \lambda_j}$$

- Thus, the mean end-to-end delay for class  $r$  is

$$\bar{T}(r) = \sum_{j \in J(r)} \bar{T}_j = \sum_{j \in J(r)} \frac{1}{\mu_j(1 - \rho_j)} = \sum_{j \in J(r)} \frac{1}{\mu_j - \lambda_j}$$

**THE END**

