



IP Telephony

Overview of IP Telephony
Media processing, RTP, RTCP
Quality of Service

Course scope - lecture scope

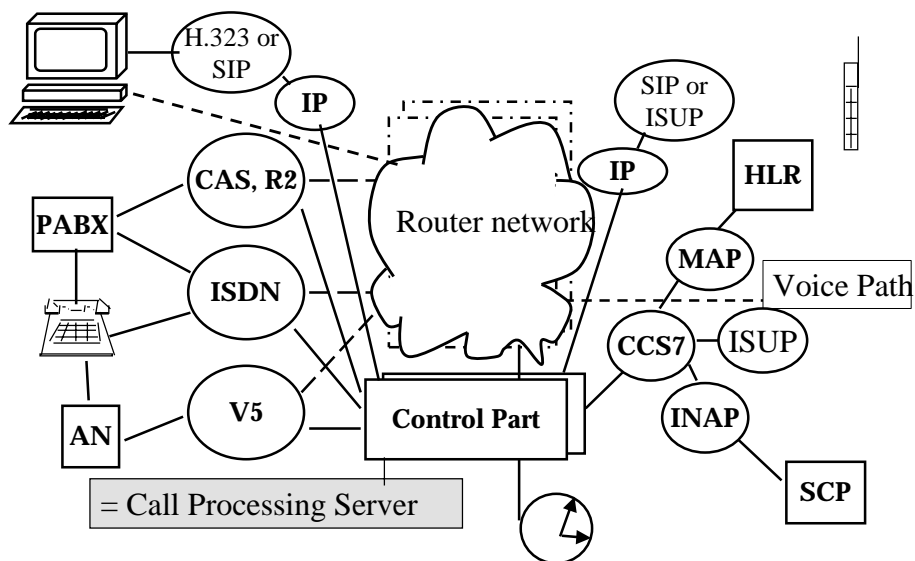

Data traffic will dominate voice in volume.
Therefore Data will drive the Network Architecture.

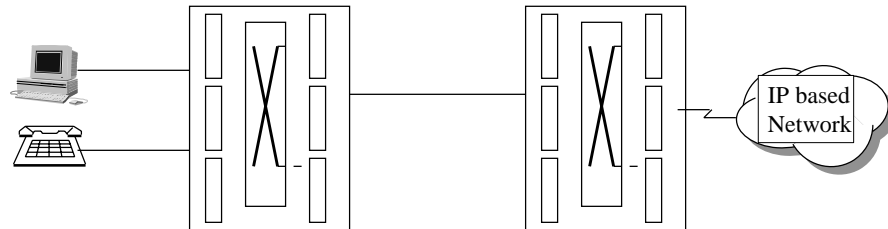


← Point of packetization moves towards access


- Broadband Networks will be based on packet switching
- BB network emerges from the existing Internet
- Each step of Development pays for itself.

VoIP in action

Coded samples (G.711, G.729B, G.723.1)

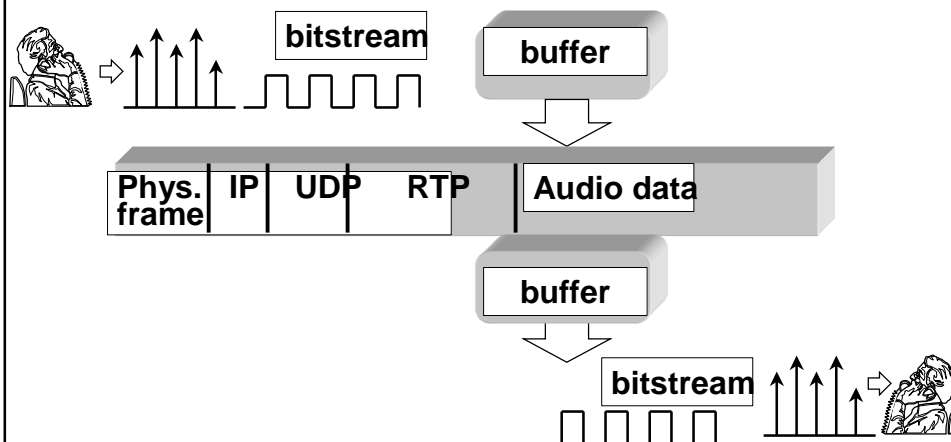

Delay variance is compensated at reception by buffering

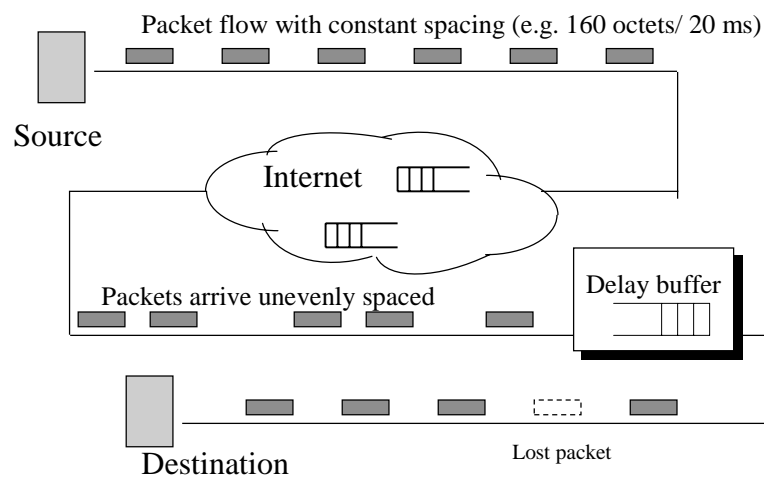

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 5

IP Telephony Standardization is active on de-jure and de-facto fora


- ITU-T - H.3xx, H.2xx series
- ETSI - TIPHON project - Telecommunications and Internet Protocol Harmonisation over Networks
- IPTEL and PINT - WGs of the IETF
- MMUSIC - WG of the IETF (Multiparty Multimedia Session Control)
- SIGTRAN (ISUP over IP)
- VOIP - Voice over IP by IMTC - Int'l Multimedia Teleconferencing Consortium

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 6

TIPHON specifies IP Voice to PSTN/ISDN/GSM Interworking

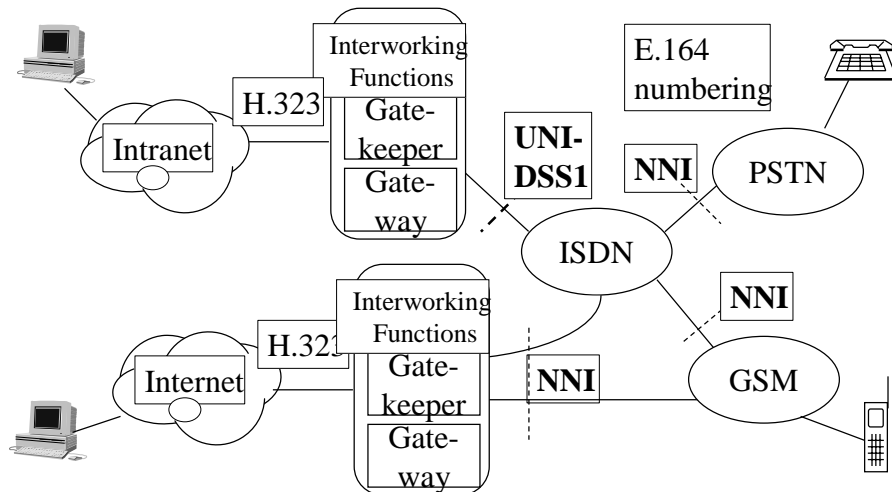

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 7

H.323 products are available


- ITSPs are strongly committed to H.323
- MS Netmeeting, Intel Videophone, Netscape Conference are examples of H.323 clients
- H.323 version 2 products are available
- Gateways and Gatekeepers/Call managers are available

Raimo Kantola/k2002

Telecommunications Switching Technology


18 - 8

IETF alternatives to H.323 pursue Integration of Telephony to the Web



- AVT - Audio Video transport (...RTP)
- PINT worked on Click-to-Dial, Click-to-Fax, Click-to-Fax-Back "www-buttons". The idea is to integrate www to IN
- Mmusic (now SIP group) works on SIP - idea is to use web-technology to absorb signaling
 - SIP has been adopted by 3GPP for 3G packet telephony
- Media Gateway Control (Megaco)
- SIGTRAN works on C7 over IP
- ENUM - numbering info in DNS


Roadmap to the Future

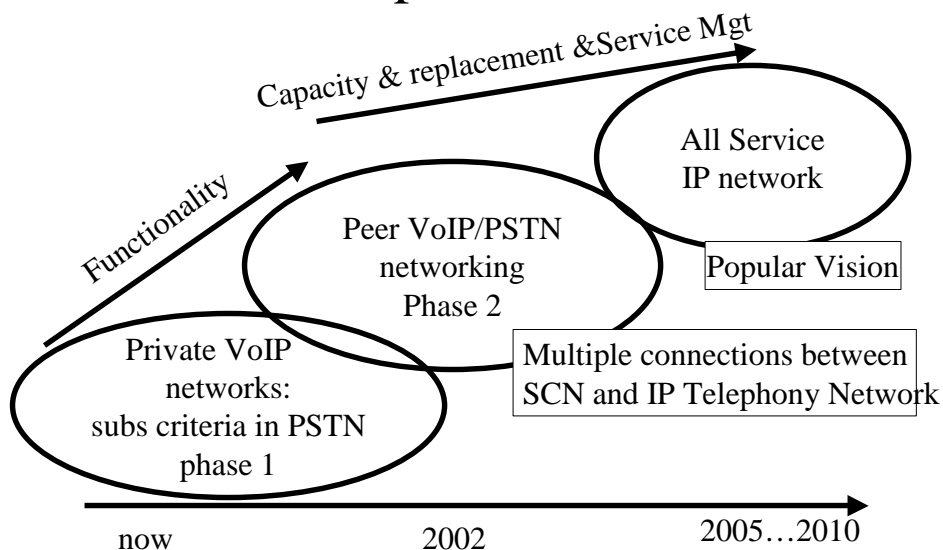


Interoperability Issues

• Signaling and Call control	Phase 1
• Quality of Service	---
• Telephony Routing and addressing	Phase 2
– Input Information gathering	-->
– Alternative routing over IP	
• Service Management in the hybrid network	Phase 3

IP Voice in Ethernet - Delay is in the Workstation (IPANA -97)

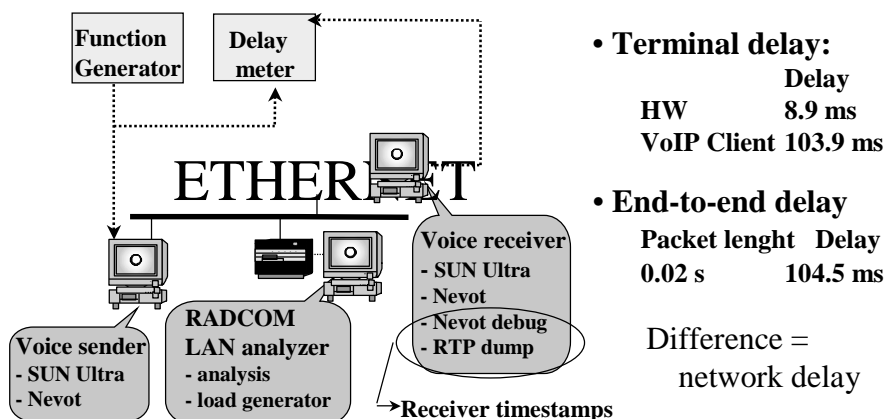


Packet spacing difference in a campus network

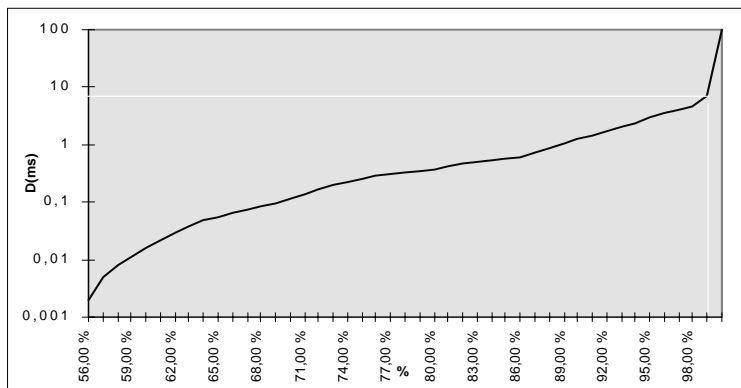

- In the public Internet lack of bandwidth, congested routes/links and underdeveloped charging are blockers to IP Voice.

Media processing path in terminals and gateways

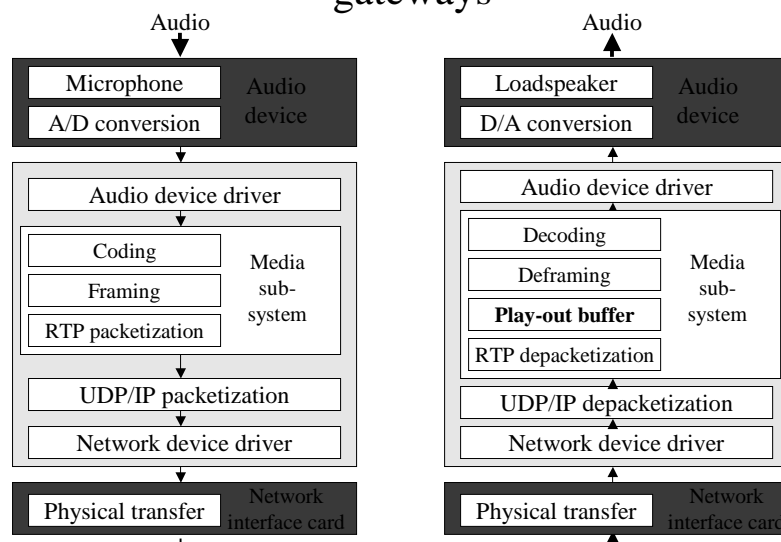

Delay in practical IP voice systems

Delay component	ms	Explanation
Audio HW & device driver	0-100	Buffering
Algorithm	20-37.5	Sample length + lookahead time
Operating system	0 - 30	Depends on load and implementation
Coder	<5	Predictable delay in coding algorithm
Decoding	<1	Typically an easy process
Framing and packetization	<1	A small software delay
NIC and device driver	<5	Has some significance especially in WLAN
Network	0 - 500	In LAN about 1 ms, Dimensioning Issue!
Play-out buffer	0 - 100	At reception, depends on the state of the network
Synchronization	0 - 30	Audio device requests for data at constant intervals that can not be synchronized with packet arrivals. Avg = half a packet time


Source: M.Sc thesis by Jari Selin

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 15

Voice quality starts to degrade, when end-to-end delay $> 150\text{ms}$

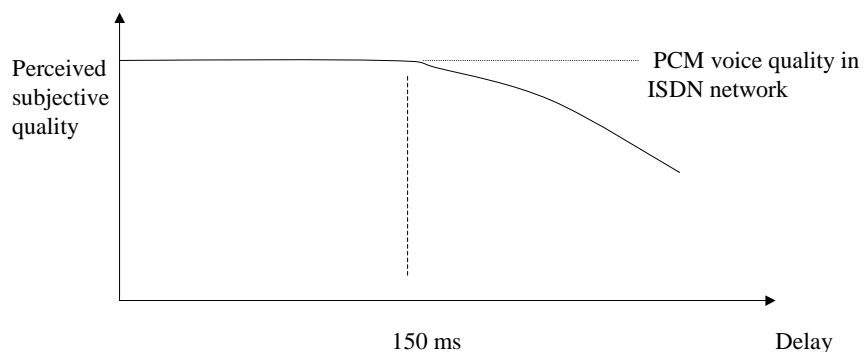


Quality can be measured e.g. based on the E-model or using MOS –measurements.
MOS - Mean Opinion Score.

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 16


Packetization of voice samples in ATM cells

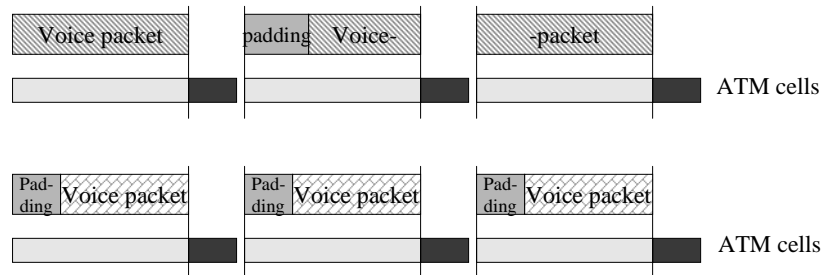

- Length of voice packet depends on coding method and the length of voice frame
- Packet overhead includes ATM headers and padding, which is needed in order not to increase packet delay.

Packet header and padding overhead is significant

Percentage of voice payload when samples are carried over IP, UDP and RTP protocols, and IP is carried over ATM

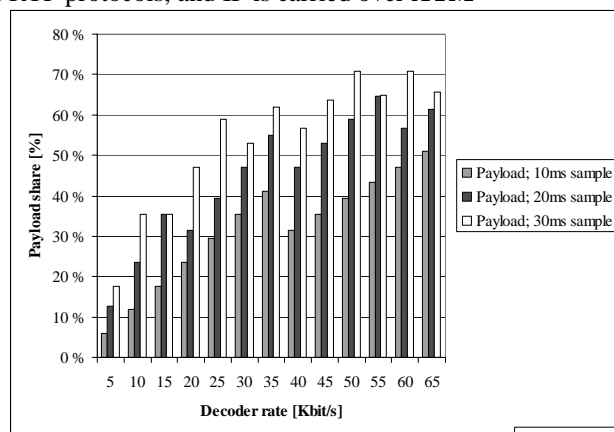

Source: Veikko Brax

Why voice over IP, when ISDN/GSM work perfectly well?

NB: Voice brings currently ca. 90% of operator revenues!

- Integration of voice and data networks creates new services.
- Maintaining two networks is expensive.
- Data traffic grows >30%/year, voice \approx 5%/y, volumes are approximately equal now. If trend continues, in 2010 share of voice will be 10%, data will be 90% of all traffic.
- Cost of transmission is in free fall: xDSL, SDH, WDM - this trend is difficult to take advantage of using circuit switching: only one sample (8 bits) can be switched at a time cmp. E.g. 20 ms sample \Rightarrow 1 Gbit router is less expensive than an exchange with a 1 Gbit switch fabric.
- Terminals can do more \rightarrow consumer market economy helps.

Real time Services in IP

RTP (RFC 1889)

RTCP - “ -

Telephony over IP


TCP is not suitable for real time services

Applications include

- Audio and video conferencing
- Shared workspaces
- Telephony
- Games
- Remote medicine
- ...

- TCP is point-to-point - not suitable for multicast
- TCP has retransmission for lost segments --> out of order delivery
- No mechanism for associating timing info with segments

Variable delay has to be compensated at reception by delay buffer

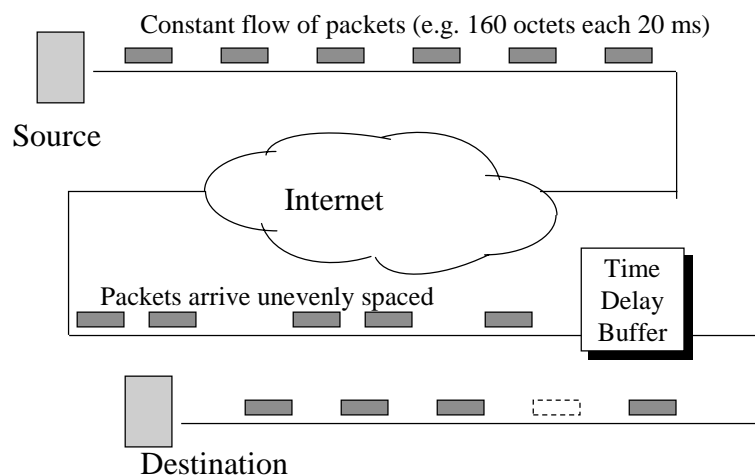

Packet arrival process is characterised by delay jitter and packet spacing difference

Delay jitter = Maximum variance in packet delay in a session

Example: fastest packet arrive in 1 ms
slowest arrive in 8 ms.
Delay jitter is 7 ms.

Packet spacing difference is measured based on receiver clock only:

$$\text{Spacing difference} = [(t_i - t_{i-1}) - (t_j - t_{j-1})]$$


Soft real time communications tolerate some loss but need the following

- Low jitter and Low latency
- Ability to integrate real-time and non-real-time services
- Adaptability to changing network and traffic conditions
- Performance for large networks and large number of connections
- Modest buffering requirements in the network
- Effective capacity utilization
- Low processing overhead per packet

RTP - Real time protocol is a “sub-layer” library on top of UDP

MPEG

H.261




- RTP leaves recovery from loss to the application
- Instead of retransmission e.g. more compact coding may be chosen
- RTP provides sequencing

RTP supports the transfer of real time data among participants of a session

- Session is defined by
 - RTP port number (dest port in UDP header of all receivers)
 - RTCP - Real time control protocol port number
 - Participant IP addresses - multicast address or a set of unicast addresses
- For session set-up e.g H.323 or SIP - Session Initiation Protocol can be used

RTP transport model includes sources, relays and receivers

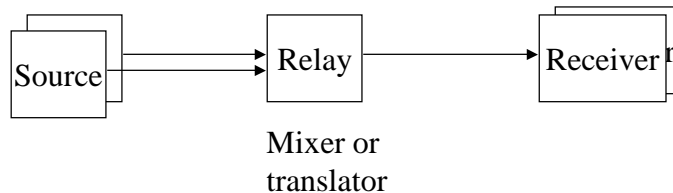


- A mixer will combine sources - e.g. add voice signals from all conference participants
- A translator may translate from one video format to another
- The relay will mark itself as the synchronisation source

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 27

RTP header

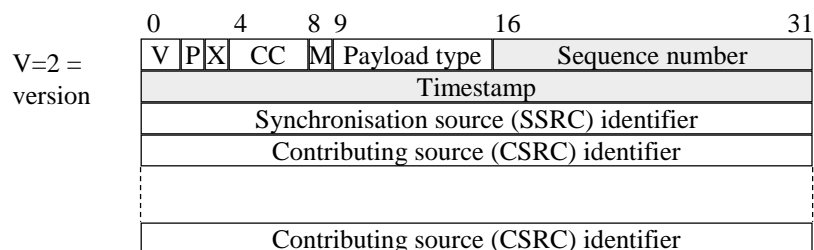


- V=2 = version
- P - Padding - indicates that last octet of payload = nrof preceeding padding octets
- X - Extension - there is an experimental extension header
- CC - CSRC count - Nrof CSRC identifiers following the fixed header
- M - Marker - e.g. End of video frame, Beginning of talk spurt
- Payload type - format of RTP payload.
- Seq. nr - each source starts at a random nr and +=1 for each packet - determines order of packets with the same timestamp
- Timestamp - value of local clock at source at generation of first octet of payload
- SSRC and CSRC identifiers are generated at random

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 28

RTCP - RTP Control Protocol provides feedback among participants of the session

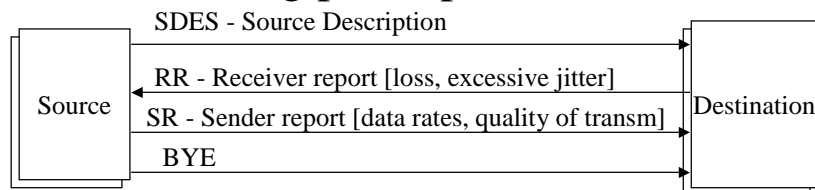

- RTCP packets may be multicast in parallel to RTP using another UDP port
- RTCP source is identified by plain text
- Few participants: RTCP reports are sent once in 5s
Rate of reports is reduced to max 5% of session traffic if there are more participants

RTCP fixed header is

0	4	8	16	31
V	P	RC/SC	PT	Length
SSRC of sender (or CSRC)				

V = 2 = version, P - Padding, same as RTP

RC - Reception report block count in SR or RR

SC - Source item count in SDES or BYE

PT - RTCP packet type [RR, SR, SDES, BYE]

Length - length of this packet in 32 bit words - 1

SSRC - same as in RTP

Sender Report carries sender info and reception report blocks

Sender information is

NTP timestamp (MS word)	NTP is the wallclock time when sending this report (used for round-trip time measurement)
NTP timestamp (LS word)	
RTP timestamp	RTP timestamp let relate this report to RTP stream
Sender's packet count	Packet and octet counts run from beginning of session
Sender's octet count	

Reception report
block

SSRC_i (SSRC of source)	
Fraction lost	Cum nrof packets lost
Ext highest seq nr received	
Interarrival jitter	
Time of last sender report	
Delay since last sender report	

SSRC identifies source

Fraction lost since last SR or RR, Cum loss is for the whole session

16 LS bits= highest RTP seq nr. 16 MS bits= nrof times seq nr has wrapped back to zero

SR is sent by party who is both sender and receiver !

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 31

Average inter-arrival jitter for a source is estimated as follows

$S(i)$ = Timestamp from RTP data packet i

$R(i)$ = Time of arrival of data packet i in RTP timestamp units

$D(i) = (R(i) - R(i-1)) - (S(i) - S(i-1))$

$J(i)$ = Estimate of Inter-arrival jitter up to the receipt of RTP packet i

$$J(i) = 15/16 * J(i-1) + 1/16 * |D(i)|$$

- Receivers use the estimate of Jitter to adjust the play-out delay
- According to measurements the above exponential average is not always optimal

Raimo Kantola/k2002

Telecommunications Switching Technology

18 - 32

RTCP other packets

- RR are made of the fixed header + reception report blocks (see SR format lower part)
- SDES can carry
 - CNAME - Canonical Name
 - NAME - Real user name of the source
 - Email address of the source
 - Phone number of the source
 - TOOL - name of the tool used by the source

How to provide SCN-like QoS over IP?

- Integrated Services (use RSVP to make reservations in routers for each call!) changes Routers into SCN-Exchange -like systems. Does not scale well.
- DiffServ
 - mark voice packets with higher than BE priority at ingress
 - priority queuing in transit nodes
 - How to prevent voice from blocking BE traffic?
 - How to do Service Management?
 - Voice packets have high overhead - how to minimize?
- Overprovisioning

How is IP Telephony different from Circuit switched telephony?

Circuit Telephony

- Voice sample = 8 bits
- A- and μ -law PCM voice standard
- Reference connection gives network design guidelines => end-to-end delay is under control
- Wire-line telephones are dumb. Cellular phones are pretty smart
- Call control is tied to the voice path
- IN is used to add service processing on the side.

IP Telephony

- Voice in 10...40 ms samples, Bits in a sample can be switched in parallel
- No single coding standard
- End-to-End delay is big challenge
- Terminals are intelligent - consumer market economics
- Call control is separate from voice path - first find out whether parties want and can talk, if yes, set-up the voice path

Note: Using today's technology IP Telephony is not less expensive in replacement nor green field investments in Corporate networks!