

Routing In Ad Hoc Networks


Contents

1. Introduction to ad-hoc networks
2. Proactive routing protocols
 - OLSR
3. Reactive routing protocols
 - DSR, AODV
4. Non-uniform routing protocols
 - ZRP, CEDAR
5. Other approaches
 - Geographical routing

Material


- RFC 3561 - Ad hoc On-Demand Distance Vector (AODV) Routing
 - rfc3561.txt
- Dynamic Source Routing Protocol for Mobile Ad Hoc Networks
 - rfc4728.txt
- The Zone Routing Protocol (ZRP) for Ad Hoc Networks
 - draft-ietf-manet-zone-zrp-04.txt
- Charles E Perkins: Ad Hoc Networking

Introduction – fixed and wireless networks

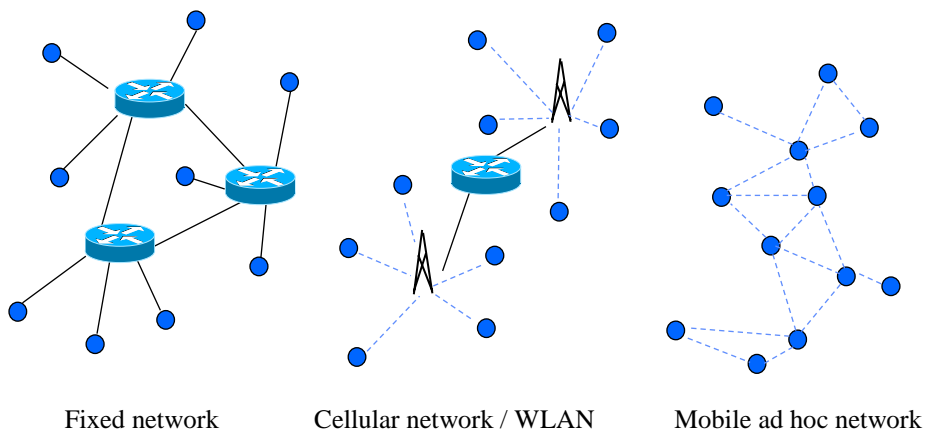

Mobile Ad Hoc Networks (MANETs)

- Network of mobile *wireless* nodes
 - No infrastructure (e.g. basestations, fixed links, routers, centralized servers)
 - Data can be relayed by intermediate nodes
 - Routing infrastructure created dynamically

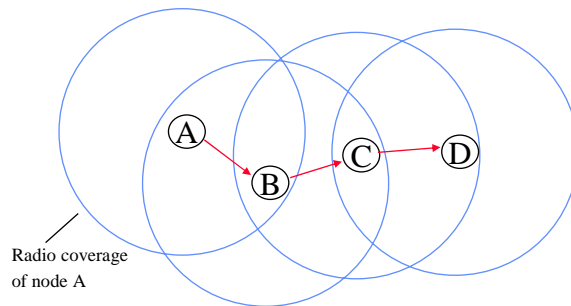


Traffic from A → D is relayed by nodes B and C

Ad Hoc Networks

- Characteristics
 - Dynamic topology (a “link” exists if two nodes have radio connectivity)
 - Links are low bandwidth, variable capacity, sometimes unidirectional
 - Limited battery power and other resources in the nodes
 - Many route alternatives (every node is a router)
- Typical applications
 - Military environments (soldiers, tanks, airplanes)
 - Emergency and rescue operations
 - Meeting rooms
 - Personal area networking, e.g. Bluetooth
 - Wireless home networking
 - Special applications (industrial control, taxis, boats)

Routing in Ad Hoc Networks

- Challenges
 - Dynamic topology
 - Unreliable links
 - Limited resources (battery, processing power)
 - Low link bandwidth
 - Security
 - No default router available
- No physical links
 - Wireless links created and destroyed as nodes move
 - Frequent disconnections and partitions

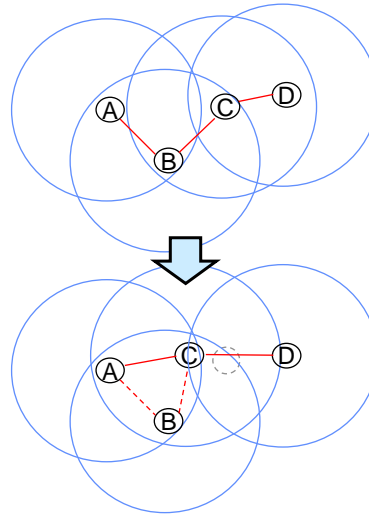

Traditional routing is proactive

- In *proactive routing* (table-driven routing), the routing tables are created before packets are sent
 - Link-state (e.g. OSPF)
 - Distance-vector (e.g. RIP)
- Each node knows the routes to all other nodes in the network
- Problems in Ad-Hoc networks
 - Maintenance of routing tables requires much bandwidth
 - Dynamic topology \Rightarrow much of the routing information is never used
 - \Rightarrow Waste of capacity
 - Flat topology
 - \Rightarrow Host-specific routes, no aggregation

Reactive routing works better in dynamic environments

- In *reactive routing* (on-demand routing) the routes are created when needed
 - Before a packet is sent, a *route discovery* is performed to find the destination
 - The route is stored in a cache as long as it is used
 - When intermediate nodes move, a *route repair* is required
- Advantages
 - Only required routes are maintained
- Disadvantages
 - Delay before the first packet can be sent
 - Route discovery usually involves flooding

Routing protocols in Ad Hoc Networks


- Many routing protocols have been proposed
 - Both proactive and reactive
 - Some protocols adapted from wired networks, some invented for mobile ad hoc networks
- No single protocol works well in all environment
 - Depends on traffic patterns, density of nodes, degree of mobility, etc.
 - Attempts to combine different solutions, e.g. adaptive and combinations of proactive and reactive protocols
- Standardization in IETF
 - MANET (Mobile Ad hoc Network) working group
 - Currently considered routing protocols: DSR, AODV, OLSR, TBRPF
 - MobileIP

Proactive routing protocols in ad hoc networks

- Protocols
 - DSDV (Destination Sequenced Distance-Vector)
 - WRP (Wireless Routing Protocol)
 - GSR (Global State Routing)
 - FSR (Fisheye State Routing)
 - OLSR (Optimized Link State Routing)
 - RFC 3626, draft-ietf-manet-olsrv2-04.txt

Optimized Link State Routing (OLSR) is a proactive link state protocol

- Reduces the traffic by using *Multipoint Relays* (MPR)
 - A MPR is a neighbor which is chosen to forward packets
 - The MPRs are selected as the minimal set of one-hop neighbors that covers all two-hop neighbors of a node
 - Packets are only forwarded by the MPRs \Rightarrow reduces overhead
 - Information for selecting MPRs is gathered from Hello messages



Node A has chosen neighbors C, E and G as its MPR, because they cover all two-hop neighbors (H to N)

OLSR messages

- *Hello* messages are sent periodically to all neighbors
 - Contains information about neighbors, nodes chosen as MPR, list of neighbors without bidirectional connectivity
 - Bidirectional connectivity declared when own address is included in Hello message sent by the neighbor
- *Topology Information* messages are periodically flooded to the network
 - Contains the neighbors that selected this node as their MPR
 - Describes the topology
- *Multiple Interface Declaration* messages are flooded by nodes with OLSR running on several interfaces

OLSR

- Routing table is calculated from the learned information
 - Neighbors learned from Hello messages
 - Other nodes learned from Topology Information messages
- OLSR is suitable for large and dense networks that are not too dynamic

Reactive routing protocols in ad hoc networks

- Reactive routing protocols
 - DSR (Dynamic Source Routing)
 - RFC 4728
 - AODV (Ad-hoc On-demand Distance Vector)
 - RFC 3561
 - DYMO (Dynamic MANET On-demand)
 - draft-ietf-manet-dymo-02
 - TORA (Temporally Ordered Routing Algorithm)
 - ABR (Associativity Based Routing)

Route discovery in reactive routing protocols is based on flooding


- The source must discover a route to the destination
 - The source broadcasts a *route request* message with an empty path field
 - Each node re-broadcasts the route request if it has not been seen before, and adds its own address to the path field
 - When the destination receives the route request, it generates a *route reply*, which traverses the reverse path back to the source
 - The route is learned by the source or by the intermediate nodes
- Route discovery effectively floods the network with the route request packet

Reactive routing – route maintenance

- The source and the intermediate nodes must maintain the route when it is used.
- If the route is broken due to topology changes, the route must be *repaired*
 - The source sends a new route request to the destination
 - Improvement: Intermediate nodes can discover broken links and locally repair the connection
- Intermediate nodes can remember successful paths
 - If a route request to the destination is received from another node, the intermediate node can answer on behalf of the destination


Example reactive protocol: Dynamic Source Routing (DSR)

Source node S has a packet to send to D. It floods a Route Request (RREQ) with its own address in the path.

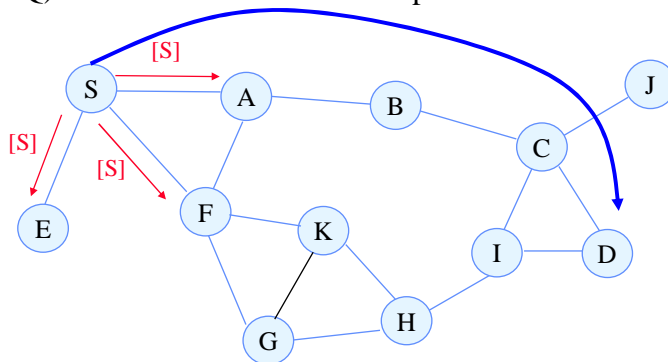


Example reactive protocol: Dynamic Source Routing (DSR)

Nodes receiving the Route Request inserts their address to the path and forward the request to their neighbors.

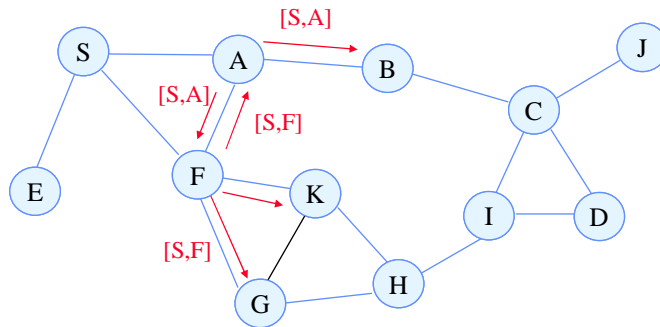


Example reactive protocol: Dynamic Source Routing (DSR)

The process is repeated...

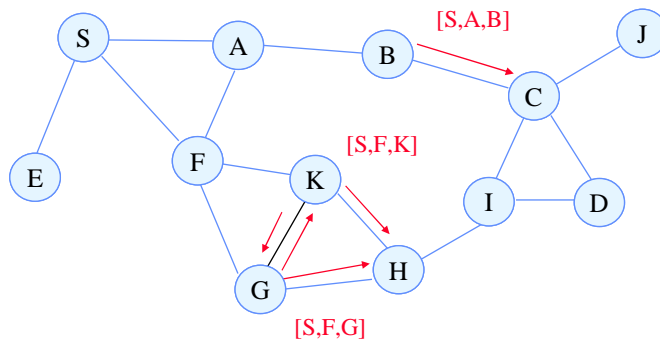


Example reactive protocol: Dynamic Source Routing (DSR)

Finally the destination node receives the Route Request

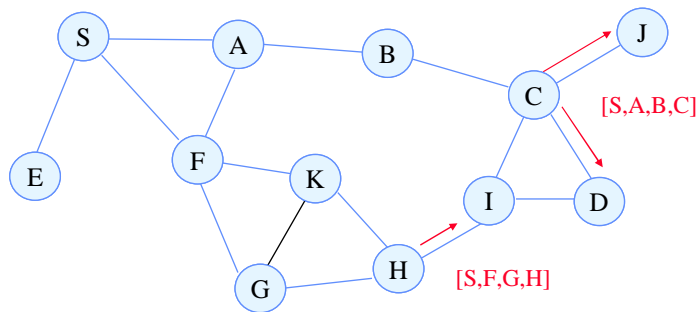


Example reactive protocol: Dynamic Source Routing (DSR)

The destination generates a Route Reply (RREP), which is forwarded back to the source along the reversed path.

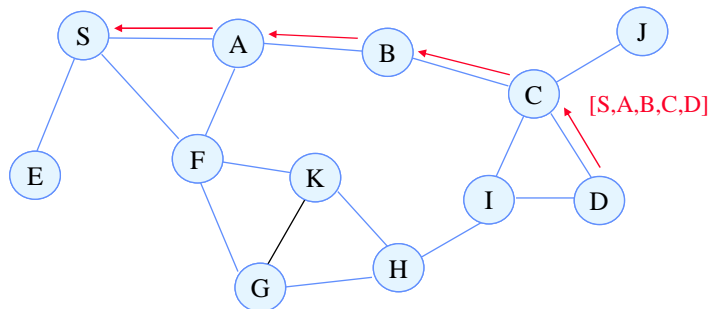

Dynamic Source Routing (DSR) is based on source routing

- The source node caches the path received in the RREP
- The entire route is included in packets sent from S
 - ⇒ Source routing
- The source node also learns the routes to the intermediate nodes
 - S also learns route to A, B and C
- Intermediate nodes learn routes to nodes in forwarded RREQ and RREP packets
 - Node B learns route to S, A, C and D

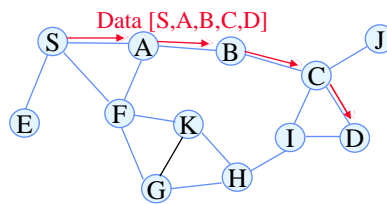

S-38.2121 / Fall-2007 / N Bejjar

AdHoc-23

Properties of DSR


- Advantages
 - Only the communicating nodes need to maintain the route
 - Several alternative routes to the destination
 - Intermediate nodes can reply to requests using their cache
- Problems
 - Long routes ⇒ Long packets
(Large overhead in e.g. small voice packets)
 - Route request is flooded to the whole network
(Can be limited with expanding ring search)
 - Congestion if too many nodes reply
 - Stale caches

S-38.2121 / Fall-2007 / N Bejjar

AdHoc-24

Ad-hoc On-demand Distance Vector Routing (AODV)

- Aims to reduce packet size by maintaining the route in the intermediate nodes as distance vectors
- *Route request* (RREQ) flooded similarly to DSR
- When the *Route reply* (RREP) is relayed, the intermediate node insert the route into their routing table
- The routing table has entries for both directions
- Entries in the forwarding table time out when not used

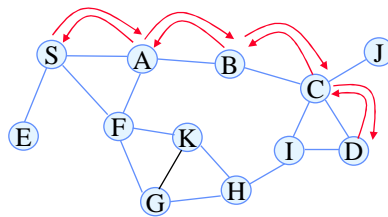

Destination	Next hop
D	C
S	A

Routing table of B

AODV routing table

For each routing table entry

- Destination IP address
- Destination sequence number (see next slide)
- Interface
- Hop count
- Next hop
- List of precursors (neighbors using it as their next hop)
- Lifetime (old entries time out)
- Flags
 - valid destination sequence number
 - valid, invalid, repairable, being repaired

The entries are identified with destination sequence numbers

- Sequence numbers are used to
 - Prevent routing loops
 - Avoid old and broken routes
- The destination generates the sequence number and includes it in the reply
- If two routes are available, the requesting node selects the one with highest sequence number
- The requesting node gives a minimum sequence number
 - Intermediate nodes can reply only if it has a route with at least the given minimum number

AODV Route requests

- A node sends a route request when it needs a route to a destination and does not have one
- Destination number in RREQ is the last known number for the destination (may be unknown)
- Expanding ring search
- Waiting packets are queued during the route request
- Intermediate nodes
 - Discards duplicate requests
 - Creates an entry towards the requester (sequence number from RREQ)
 - Used for reply
 - Creates an entry to the previous hop (no sequence number)
 - Replies if it has an active route with requested or higher sequence number
 - Otherwise broadcasts the request on all interfaces

AODV

Route replies

- If the destination replies
 - The current sequence number of the destination is first incremented if it is equal to the number in the request
 - RREP contains the current sequence number, hop count = 0, full lifetime
- If an intermediate node replies
 - The sequence number, hop count and lifetime are copied from the routing table to the RREP
 - It may be necessary to unicast a gratuitous RREP to the destination so it learns the path to the requester
- The intermediate nodes update their routing table (this is simplified)
 - The RREP is forwarded to the originator
 - The next hop to the originator is added to the precursor list

AODV

Route errors are reported

- Neighboring nodes with active routes periodically exchange Hello messages
- If a next hop link in the routing table fails, the active neighbors are informed with a *Route Error* (RERR) message
 - A neighbor is considered active for an entry, if the neighbor sent a packet within a timeout interval that was forwarded using the entry.
 - The RERR indicates the unreachable destinations
 - The sequence number for the destinations using the link is increased
- A RERR message is also generated if a node is unable to relay a message
- The source performs a new route request when it receives a RERR
- An intermediate node can perform a local repair

Non-uniform protocols

Zone Routing Protocol (ZRP)

Clustering routing protocols


Non-uniform protocols

- The previously discussed (uniform) protocols scales to networks with less than 100 nodes
- Larger networks (up to 1000 nodes) require hierarchy
- Two approaches
 1. Neighbor selection
 - Routing activity is focused on a subset of the neighbors
 - Zone Routing Protocol (ZRP)
 - Optimized Link State Routing (OLSR)
 - Fisheye State Routing (FSR)
 2. Partitioning
 - The network is topologically partitioned
 - Core Extraction Distributed Ad-hoc Routing (CEDAR)
 - Cluster Based Routing Protocol (CBRP)


ZRP – Zone Routing Protocol

- Based on the concept of zones
 - Every node has a zone consisting of the surrounding nodes within ρ hops from it
 - The zone radius (ρ) is a network-wide parameter
 - The zones of neighboring nodes overlap
- Proactive routing used within the zone
 - Packets are most likely sent to nearby located destinations
 - Reduces the topology maintenance costs to a limited zone
- Reactive routing used outside the zone
 - Uses local topology information \Rightarrow not all nodes are queried
 - Bordercasting sends the route request to the border of the zone


ZRP – Zone Routing Protocol

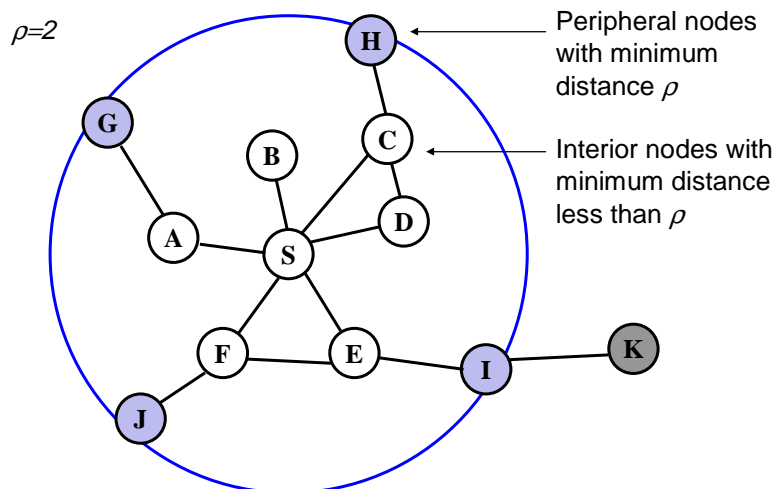


ZRP Example (1)

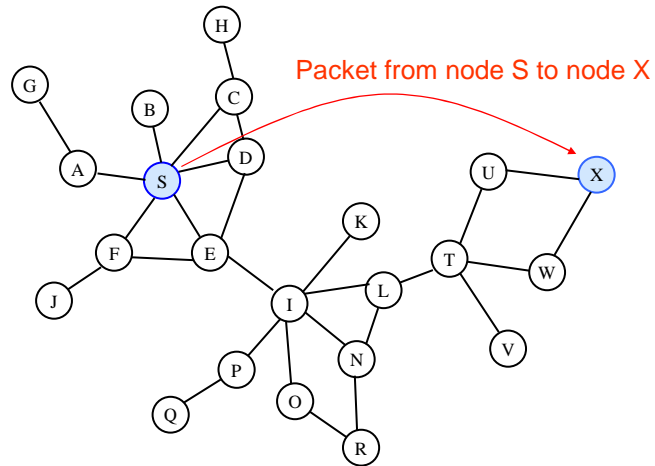


ZRP Example (2)

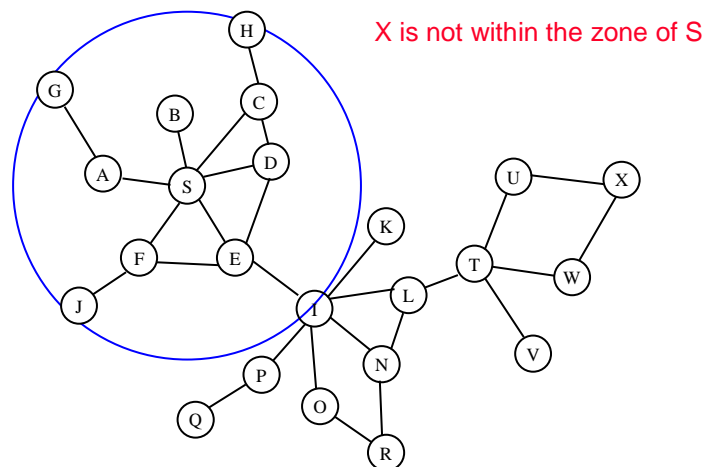


ZRP Example (3)

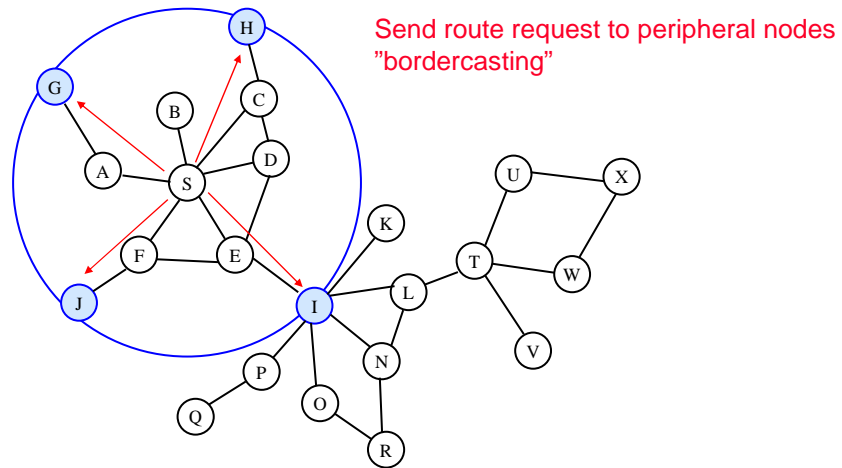

ZRP Example (4)

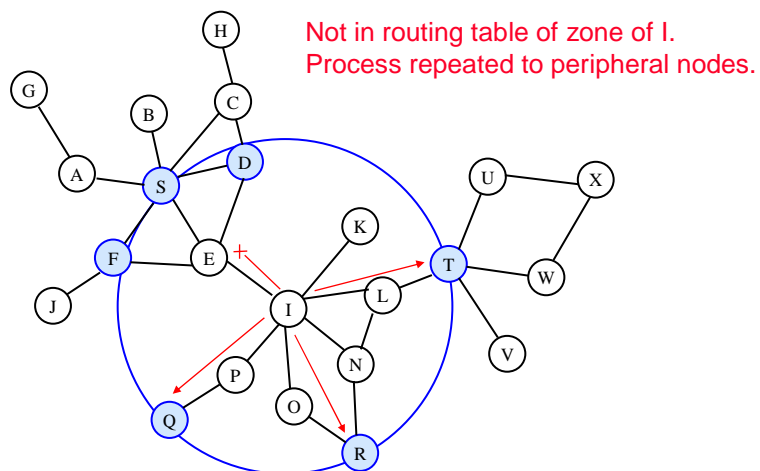


ZRP Example (5)

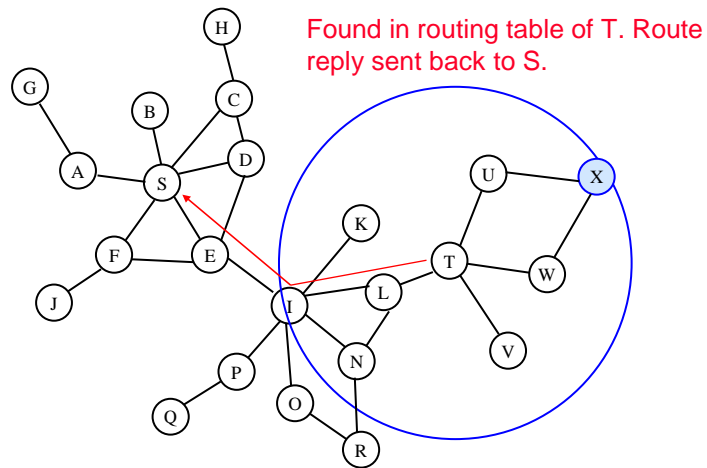


Clustering Routing Protocols

E.g. Core-Extraction Distributed Ad hoc Routing (CEDAR)

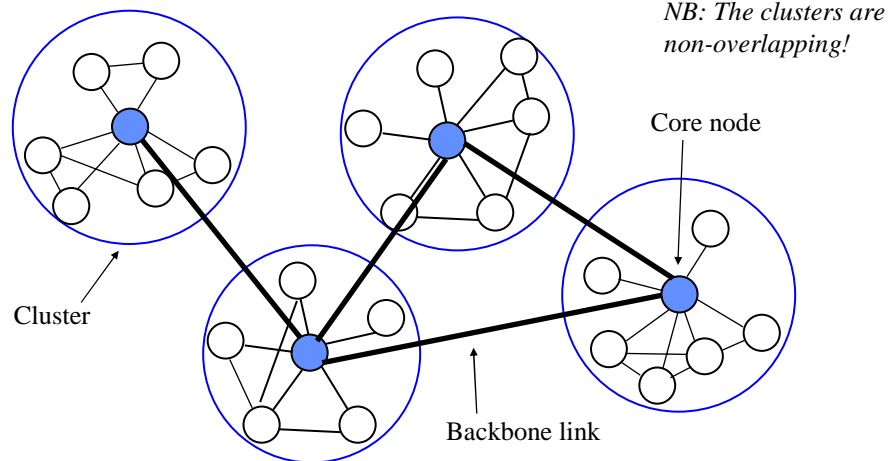

Summary, other approaches

Routing Protocol Classification

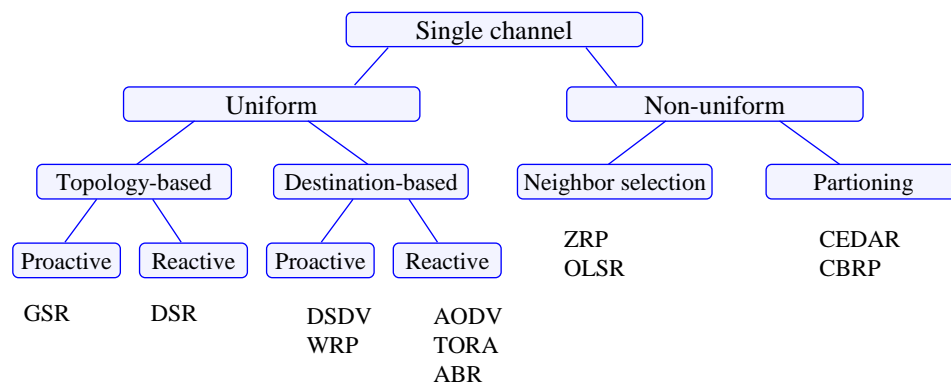

[L.M. Feeney, SICS]

Other routing approaches

- Geographical Routing
 - Utilize location information in routing
- Associativity-Based Routing (ABR)
 - Only links that have been stable for some time are used
- Multicasting in Ad hoc networks

Geographical routing in Ad hoc networks

- All nodes know their position (GPS, relative position)
- 1. Locating the destination (given the address, obtain the location)
 - Location service
 - Grid's Location Service (GLS)
 - Location updates
 - Predictive Location-based QoS Routing (PLQR)
 - Nodes send location updates periodically (interval depends on speed)
 - Extra updates are sent when velocity or direction changes
- 2. Routing to a destination (given the location, route the packet)
 - Geographical Routing Algorithm (GRA)
 - Each node routes the packet to the node that is closer to the destination than itself
 - Route discovery (flooding) if there is no node closer

Good luck in the exam!