

# Teletraffic Analysis of Multicast Networks

Samuli Aalto, Jouni Karvo, Eeva Nyberg, Jorma Virtamo Networking Laboratory Helsinki University of Technology

samuli.aalto@hut.fi

#### **Outline**

- Introduction to traditional teletraffic theory
  - single link analysis
  - Erlang's formula
- Teletraffic analysis of unicast access networks
  - Convolution-Truncation algorithm
- Teletraffic analysis of multicast networks
  - Multicast setup
  - Convolution-Truncation type algorithm
  - Variations


Unicast = point-to-point


Multicast = point-to-multipoint



# Part I Introduction to traditional teletraffic theory


- General purpose: determine relationships between
  - quality of service
  - traffic load
  - system capacity
- To describe the relationships quantitatively, mathematical models are needed



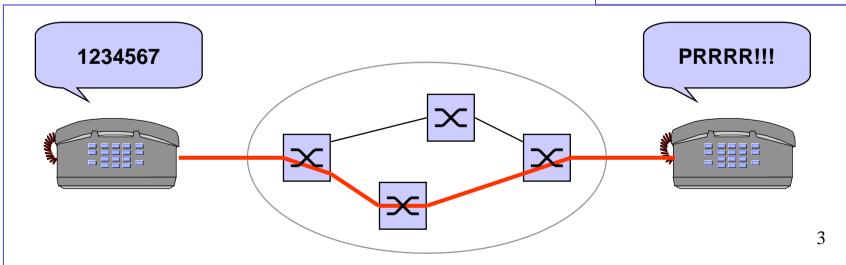


#### Simple teletraffic model (Erlang's loss model)

- Consider a link between two telephone exchanges
  - traffic consists of the ongoing telephone calls on the link
  - calls **arrive randomly** at rate  $\lambda$  (calls per time unit)
  - a call occupies one channel in the link for a random (IID) holding time with mean  $1/\mu$  (time units)
  - there are C parallel channels available
  - blocked calls (arriving in a full system) are lost

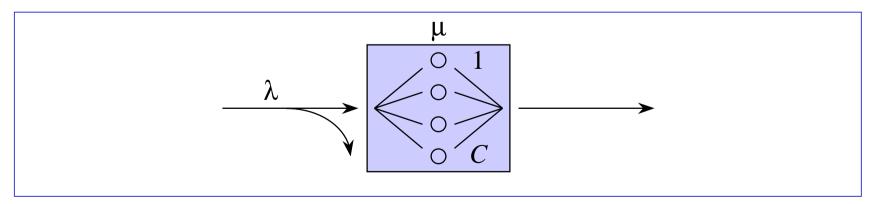

# **Traffic process**

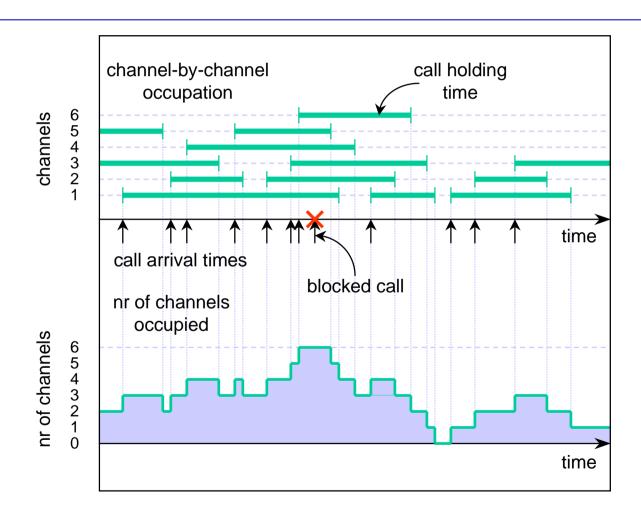

### **Teletraffic analysis (1)**

- $\widetilde{X}(t)$  = number of channels occupied at time t
  - under exponential assumptions (Poisson arrivals and exp. holding times),  $\widetilde{X}(t)$  is a Markov birth-death process (and, thus, reversible)

$$0 \xrightarrow{\lambda} 1 \xrightarrow{\lambda} \bullet \bullet \bullet \xrightarrow{\lambda} C 1 \xrightarrow{\lambda} C C$$

• Stationary distribution ( $a := \lambda/\mu = \text{traffic intensity}$ ):

$$P\{\widetilde{X} = n\} = \frac{\frac{a^n}{n!}}{\sum_{m=0}^{C} \frac{a^m}{m!}}$$
 (truncated Poisson distribution)

#### Teletraffic analysis (2)

Time blocking  $B_t$  = probability that the system is full

Time blocking 
$$B_t$$
 = probability that the system is full 
$$B_t \coloneqq P\{\widetilde{X} = C\} = \frac{\frac{a^C}{C!}}{\sum\limits_{m=0}^{C} \frac{a^m}{m!}}$$
 (Erlang's formula) Call blocking  $B_c$  = probability that a call is lost

**Call blocking**  $B_c$  = probability that a call is lost


$$B_{C} := \frac{P\{\widetilde{X} = C\}\lambda}{C} = P\{\widetilde{X} = C\} = B_{t} \qquad \text{(PASTA)}$$

$$\sum_{n=0}^{C} P\{\widetilde{X} = n\}\lambda$$

$$0 \xrightarrow{\lambda} 1 \xrightarrow{\lambda} \cdots \xrightarrow{\lambda} C 1 \xrightarrow{\lambda$$

#### **Truncation principle**

- X(t) = number of channels occupied at time t in a system without capacity constraints ( $C = \infty$ )
  - under exp. assumptions, X(t) is another Markov birth-death process



Stationary distribution:

$$P{X = n} = \frac{a^n}{n!}e^{-a}$$
 (Poisson distribution)


Thus, Truncation Principle applies:

$$P\{\widetilde{X} = n\} = \frac{P\{X = n\}}{P\{X \le C\}}, \quad B_c = B_t = \frac{P\{X = C\}}{P\{X \le C\}} = 1 - \frac{P\{X \le C - 1\}}{P\{X \le C\}}$$

#### **Insensitivity**

- It is possible to show (e.g., by using the GSMP theory) that the stationary distribution and, thus, the blocking probabilities remain the same even if the holding time distribution is more general than exponential distribution
- So, in this sense, the results are insensitive to the holding time distribution

# Part II Teletraffic analysis of unicast access networks

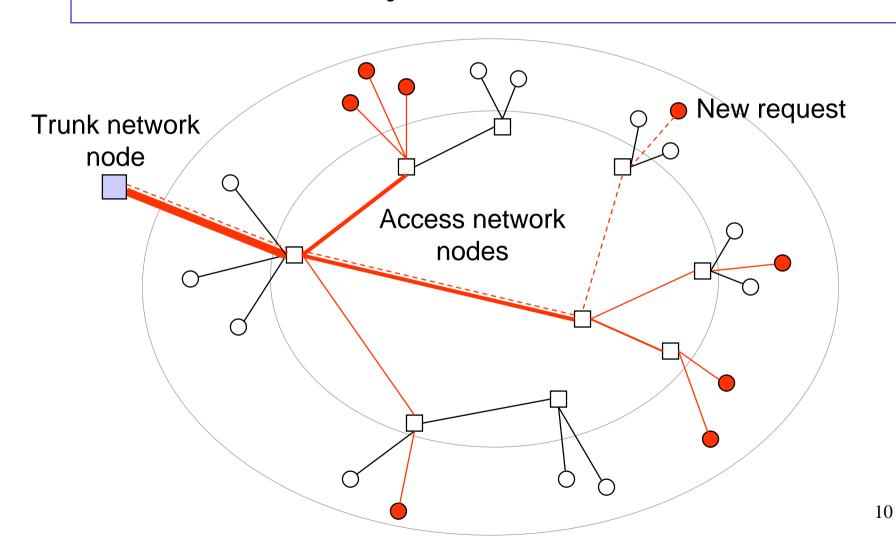


#### Setup

- Circuit-switched telephone network
- A number of users  $u \in U$  physically connected with a unique trunk network node by a hierarchial access network with tree topology
  - the trunk network node located at the root node
  - users located at leaf nodes
  - users behave independently
  - unicast connection requests (between the trunk network node and users) arrive randomly
  - random (IID) connection holding times
  - required capacity per link per ongoing unicast connection = 1 unit
- Physical links  $j \in J$  with finite capacities  $C_j$

### Teletraffic analysis (1)

- Consider first a network without capacity constraints
- $Y_u(t)$  = state of user u at time t
  - $-Y_{u}(t) \in \{0,1\}$
  - under exponential assumptions,  $Y_u(t)$  is a Markov birth-death process (and, thus, reversible)

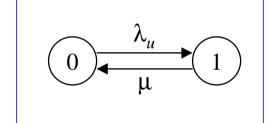

- stationary distribution ( $a_u := \lambda_u/\mu$ ):


$$\pi_u(y) := P\{Y_u = y\} = \begin{cases} \frac{1}{1+a_u}, & y = 0\\ \frac{a_u}{1+a_u}, & y = 1 \end{cases}$$

### Teletraffic analysis (2)

- $Y_j(t)$  = state of link j at time t
  - $Y_j(t) \in \{0,1,...,|U_j|\}$

$$Y_j(t) = \sum_{u \in U_j} Y_u(t)$$

- $X(t) = (Y_u(t); u \in U)$  = network state at time t
  - -X(t) is also a reversible Markov jump process
  - stationary distribution (due to independent users):

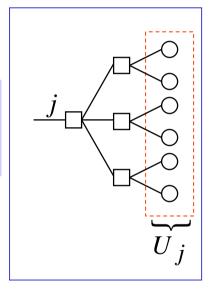

$$P\{X = x\} = \prod_{u \in U} P\{Y_u = y_u\} = \prod_{u \in U} \pi_u(y_u)$$

Thus, a closed form analytical expression exists!

### Teletraffic analysis (3)

- X = network state (without capacity constraints)
- $\widetilde{\mathbf{X}}$  = network state (with capacity constraints)
- $\widetilde{\Omega}$  = network state space (with capacity constraints)
- $\Omega_u$  = nonblocking states for user u
- $B_{u}^{t}$  = time blocking probability for user u

Due to the Truncation Principle!

$$B_u^t \coloneqq 1 - P\{\widetilde{\mathbf{X}} \in \widetilde{\Omega}_u\} = 1 - \frac{P\{\mathbf{X} \in \widetilde{\Omega}_u\}}{P\{\mathbf{X} \in \widetilde{\Omega}\}}$$
 numerator denominator

 Remark: It can be shown that this result is insensitive to the holding time distribution, as well as to the idle time distribution


### **Teletraffic analysis (4)**

- In principle, there is a closed form analytical expression both for the numerator and the denominator
- Problem: computationally complex
  - worst case: exponential in U (since  $|\Omega| = 2^U$ )
- Solution: use a recursive convolution-truncation algorithm to calculate the numerator and the denominator
  - always: linear in U
- Remark: Assuming exponential idle times, it can be shown that call blocking (for user u) equals time blocking (for user u) in a modified system, where user u is always idle

### **Recursive algorithm (1)**

#### Convolution:

$$[f \otimes g](n) := \sum_{m=0}^{n} f(m)g(n-m)$$



- Key result:
  - If link j has two downstream neighbouring links (s,t), then

$$P\{Y_j = n\} = \sum_{m=0}^{n} P\{Y_s = m\} P\{Y_t = n - m\}$$

- In other words,

$$\pi_j(n) = [\pi_s \otimes \pi_t](n)$$

### Recursive algorithm (2)


$$P\{\mathbf{X} \in \widetilde{\Omega}\} = P\{Y_j \leq C_j, \ j \in J\} \text{ denominator}$$
 
$$P\{\mathbf{X} \in \widetilde{\Omega}_u\} = P\{Y_j + 1 \leq C_j, \ j \in R_u; \ Y_j \leq C_j, \ j \in J \setminus R_u\}$$

#### • Q-functions:

$$\begin{aligned} Q_j(n) &\coloneqq P\{Y_j = n; \ Y_k \leq C_k, k \in M_j\} \\ Q_j^u(n) &\coloneqq P\{Y_j = n; \ Y_k + 1 \leq C_k, k \in M_j \cap R_u; \\ Y_k \leq C_k, \quad k \in M_j \setminus R_u\} \end{aligned}$$

#### • Truncations:


$$T_{j}f(n) := f(n) 1\{n \le C_{j}\}$$
$$T_{j}'f(n) := f(n) 1\{n + 1 \le C_{j}\}$$

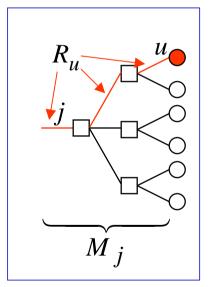

# Recursive algorithm (3)

Denominator: link state


$$P\{\mathbf{X} \in \widetilde{\Omega}\} = \sum_{n} Q_{J}(n)$$
 truncation 
$$T_{j}[\pi_{j}](n), \qquad j \in U$$
 
$$Q_{j}(n) = \begin{cases} T_{j}[\otimes Q_{k}](n), & j \notin U \\ K \in N_{j} \end{cases}$$
 convolution



Numerator:

$$P\{\mathbf{X} \in \widetilde{\Omega}_u\} = \sum_{n} Q_J^u(n)$$
 mod. truncation 
$$T_j^{'}[\pi_j](n), \qquad j = u \text{ route to user } u$$
 
$$Q_J^u(n) = \begin{cases} T_j^{'}[Q_{D_u(j)}^u \otimes (\bigotimes_{k \in N_j \backslash R_u} Q_k)](n), & j \in R_u \backslash \{u\} \\ \sum_{k \in N_j \backslash R_u} Q_k \end{pmatrix} = 0$$

# Part III Teletraffic analysis of multicast networks

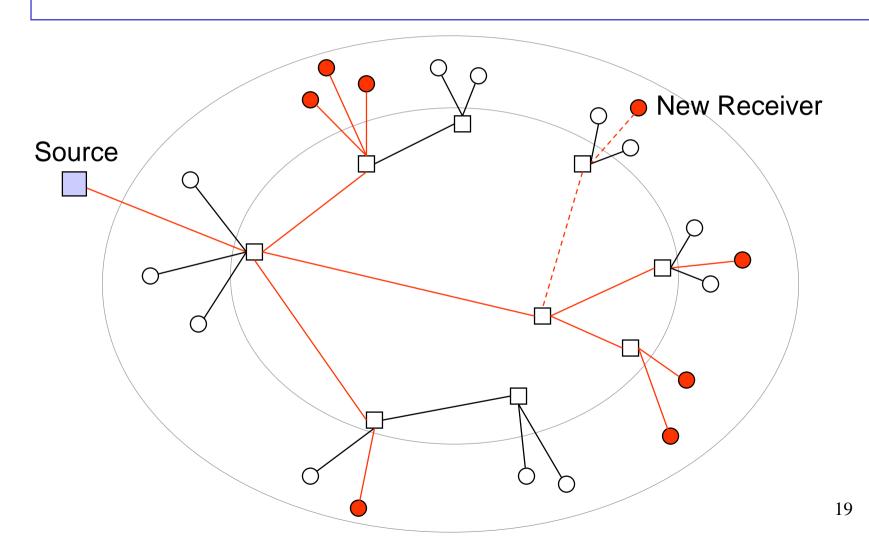

#### Setup


- Circuit-sw. network, or packet-sw. with strict quality guarantees
- A unique **source** offers a variety of **channels**  $i \in I$ 
  - e.g. audio or video streams
  - required capacity per link per active channel  $i = d_i$  units
- Each channel is delivered to users  $u \in U$  by a multicast connection with dynamic membership
  - users behave independently
  - connection requests by users to join channels arrive randomly
  - random (IID) connection holding times
- Each multicast connection uses the same routing tree
  - the source located at the root node
  - users located at leaf nodes
- Physical links  $j \in J$  with finite capacities  $C_j$

### **Teletraffic analysis (1)**

- Consider first a network without capacity constraints
- $Z_u(t)$  = state of user u at time t

$$- Z_u(t) \in \{0,1,...,I\}$$

- under exponential assumptions,  $Z_{u}(t)$  is a Markov birth-death process
- stationary distribution  $P\{Z_{ii} = i\}$  easily derived



- $\mathbf{Y}_{u}(t) = (Y_{ui}(t); i \in I)$  = state of leaf link u at time t
  - $-\mathbf{Y}_{u}(t) \in \{0,1\}^{I}$
  - $\mathbf{Y}_{u}(t)$  is a reversible Markov jump process

$$\pi_u(\mathbf{y}) \coloneqq P\{Y_u = \mathbf{y}\} = \begin{cases} P\{Z_u = 0\}, & \text{if } \mathbf{y} = \mathbf{0} \\ P\{Z_u = i\}, & \text{if } \mathbf{y} = \mathbf{e}_i \\ 0, & \text{otherwise} \end{cases}$$


# Teletraffic analysis (2)

•  $\mathbf{Y}_{j}(t) = (Y_{ji}(t); i \in I)$  = state of link j at time t-  $\mathbf{Y}_{j}(t) \in \{0,1\}^{I}$ 

$$\mathbf{Y}_{j}(t) = \bigoplus_{u \in U_{j}} \mathbf{Y}_{u}(t)$$

componentwise OR

- $\mathbf{X}(t) = (\mathbf{Y}_{u}(t); u \in U)$  = network state at time t
  - $-\mathbf{X}(t)$  is also a reversible Markov jump process
  - stationary distribution (due to independent users):

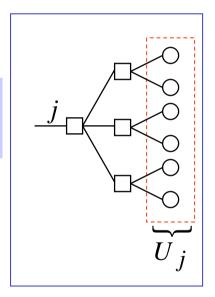

$$P\{\mathbf{X} = \mathbf{x}\} = \prod_{u \in U} P\{\mathbf{Y}_u = \mathbf{y}_u\} = \prod_{u \in U} \pi_u(\mathbf{y}_u)$$

Thus, a closed form analytical expression exists!

#### Teletraffic analysis (3)

- X = network state (without capacity constraints)
- $\widetilde{\mathbf{X}}$  = network state (with capacity constraints)
- $\widetilde{\Omega}$  = network state space (with capacity constraints)
- $\widetilde{\Omega}_{ui}$  = nonblocking states for user u and channel i
- $B_{ui}^t$  = time blocking probability for user u and channel i

Due to the Truncation Principle!

$$B_{ui}^t \coloneqq 1 - P\{\widetilde{\mathbf{X}} \in \widetilde{\Omega}_{ui}\} = 1 - \frac{P\{\mathbf{X} \in \widetilde{\Omega}_{ui}\}}{P\{\mathbf{X} \in \widetilde{\Omega}\}}$$
 numerator denominator

 Remark: It can be shown that this result is insensitive to the holding time distribution, as well as to the idle time distribution


### **Teletraffic analysis (4)**

- In principle, there is a closed form analytical expression both for the numerator and the denominator
- **Problem**: computationally complex
  - worst case: exponential in U (since  $|\Omega| = 2^{UI}$ )
- Solution: use a recursive convolution-truncation type algorithm to calculate the numerator and the denominator
  - always: linear in U
- Remark: Assuming exponential idle times, it can be shown that call blocking (for user u) equals time blocking (for user u) in a modified system, where user u is always idle 24

#### **Recursive algorithm (1)**

OR-convolution:

$$[f \otimes g](\mathbf{y}) := \sum_{\mathbf{u}, \mathbf{v}: \mathbf{u} \oplus \mathbf{v} = \mathbf{y}} f(\mathbf{u})g(\mathbf{v})$$



• Key result:

- If link j has two downstream neighbouring links (s,t), then

$$P\{\mathbf{Y}_j = \mathbf{y}\} = \sum_{\mathbf{u}, \mathbf{v}: \mathbf{u} \oplus \mathbf{v} = \mathbf{y}} P\{\mathbf{Y}_S = \mathbf{u}\} P\{\mathbf{Y}_t = \mathbf{v}\}$$

componentwise OR

In other words,

$$\pi_j(\mathbf{y}) = [\pi_s \otimes \pi_t](\mathbf{y})$$

### Recursive algorithm (2)

$$P\{\mathbf{X} \in \widetilde{\Omega}\} = P\{\mathbf{d} \cdot \mathbf{Y}_j \le C_j, j \in J\}$$
 denominator

numerator

$$P\{\mathbf{X} \in \widetilde{\Omega}_{ui}\} = P\{\mathbf{d} \cdot (\mathbf{Y}_j \oplus \mathbf{e}_i) \le C_j, j \in R_u; \mathbf{d} \cdot \mathbf{Y}_j \le C_j, j \in J \setminus R_u\}$$

• Q-functions:

componentwise OR


$$Q_{j}(\mathbf{y}) := P\{\mathbf{Y}_{j} = \mathbf{y}; \mathbf{d} \cdot \mathbf{Y}_{k} \leq C_{k}, k \in M_{j}\}$$

$$Q_{j}^{ui}(\mathbf{y}) := P\{\mathbf{Y}_{j} = \mathbf{y}; \mathbf{d} \cdot (\mathbf{Y}_{k} \oplus \mathbf{e}_{i}) \leq C_{k}, k \in M_{j} \cap R_{u}\}$$

$$\mathbf{d} \cdot \mathbf{Y}_{k} \leq C_{k}, \qquad k \in M_{j} \setminus R_{u}\}$$



$$T_{j}f(\mathbf{y}) := f(\mathbf{y}) \, 1\{\mathbf{d} \cdot \mathbf{y} \le C_{j}\}$$
$$T_{j}^{i}f(\mathbf{y}) := f(\mathbf{y}) \, 1\{\mathbf{d} \cdot (\mathbf{y} \oplus \mathbf{e}_{i}) \le C_{j}\}$$

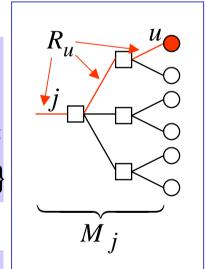

### Recursive algorithm (3)

Denominator: link state

$$P\{\mathbf{X} \in \widetilde{\Omega}\} = \sum_{\mathbf{y}} Q_J(\mathbf{y})$$

truncation 
$$y$$
 root link  $T_j[\pi_j](\mathbf{y}), \quad j \in U$   $Q_j(\mathbf{y}) = \begin{cases} T_j[\pi_j](\mathbf{y}), & j \notin U \\ T_j[\infty] Q_k](\mathbf{y}), & j \notin U \end{cases}$  OR-convolution

Numerator:

$$P\{\mathbf{X} \in \widetilde{\Omega}_{ui}\} = \sum_{\mathbf{y}} Q_J^{ui}(\mathbf{y})$$

mod. truncation

$$Q_{j}^{ui}(\mathbf{y}) = \begin{cases} T_{j}^{i}[\pi_{j}](\mathbf{y}), & j = u \\ T_{j}^{i}[Q_{D_{u}(j)}^{ui} \otimes (\bigotimes_{k \in N_{j} \setminus R_{u}} Q_{k})](\mathbf{y}), & j \in R_{u} \setminus \{u\} \end{cases}$$
 route to user  $u$ 

#### **Variations**

- Single link analysis (Karvo, Virtamo, Martikainen & Aalto, 1997-1998)
  - starting point
- Network wide analysis (Nyberg, Virtamo & Aalto, 1999)
  - all channels handled individually (as in this presentation)
  - first convolution-truncation type algorithm
  - or-convolution needed
  - "background" unicast traffic possible to be taken into account by modifing the truncation operators
- Multi-class case (Aalto, Karvo & Virtamo, 2000)
  - class = group of statistically indistinguishable channels
  - combinatorial convolution needed (instead of or-convolution)
- Multi-layer case (Karvo, Aalto & Virtamo, 2000-2001)
  - layered coding of audio/video streams
  - max-convolution needed (instead of or-convolution)

# THE END

