



HELSINKI UNIVERSITY OF TECHNOLOGY

# Resource reSerVation Protocol RSVP

Lecture for S-38.180 QoS in the  
Internet

26.9.2002 Mika Ilvesmäki



Networking laboratory




HELSINKI UNIVERSITY OF TECHNOLOGY

Mika Ilvesmäki, Lic.Sc. (Tech.)

## Purpose

- In IntServ applications have to set up a reservation before transmitting traffic
  - RSVP is a signaling protocol for applications to reserve resources by setting up state in hosts and routers





## RSVP properties

- End-to-end
  - requests from applications
- Per-flow method of signaling
  - fine-granularity
- Originally intended for IP multicast
  - receiver-oriented setup
  - reservations are one-way only



## RSVP design


- Not a routing protocol
  - designed to operate with current and future routing protocols
- Policy independent
  - RSVP is independent of the service architecture
- Soft state
  - times out unless state is refreshed
  - allows for state modification (original and refresh messages identical)
- Transparent operation through Non-RSVP clouds
- Reservations may be shared or not





## Method of establishing flow state

- sender sends a PATH –message to the receiver specifying the traffic characteristics (Tspec) and setting up the path
- receiver responds with RESV-message to request resources for the flow (Rspec)

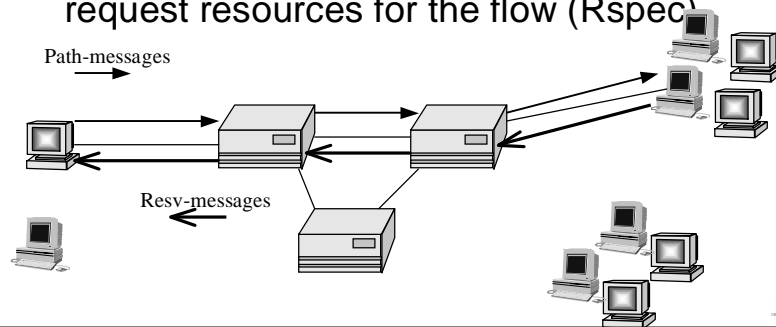


## RSVP messages

- Sent either as raw IP (protocol 46) or in UDP
- PATH
  - sent downstream along the data path installing path state
- RESV
  - reservation requests sent by the receivers



# RSVP message format

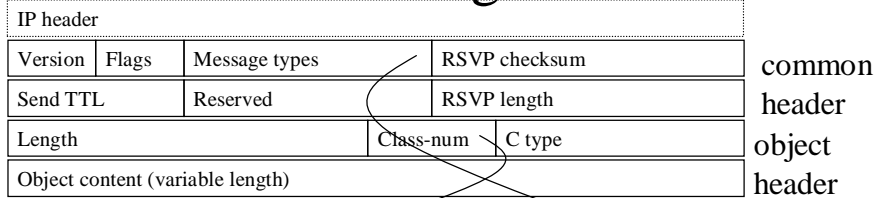


NULL	SESSION
RSVP_HOP	TIME_VALUE
STYLE	FLowsPEC
FILTER_SPEC	SENDER_TEMPLAT
SENDER_TSPEC	ADSPEC
ERROR_SPEC	POLICY_DATA
INTEGRITY	SCOPE
RESV_CONFIRM	

PATH	RESV
PATHErr	RESVErr
PATHTear	RESVTear
RESVConf	



# PATH-message


- Sent by the source
- Includes flow identification and flow characterization
- Sets up PATH-state in the router

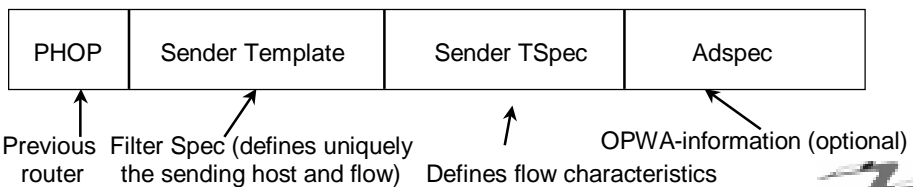



# RESV-message

- Sent by the receiver to reserve resources
- Contains the flow characterization and filter specification
- Sets up RESV-state in the router
- Flowspec may include
  - Tspec (both Guaranteed and Controlled-load)
  - Rspec (only in Guaranteed service)



Defines flow characteristics that will be requested from the routers

Defines flow id (or sender/senders)



# Reservation types

- Three reservation types are defined
  - Wild-card filter
  - Fixed-Filter
  - Shared-explicit
- WF and SE are designed for multicast

Sender selection	Reservations	
	Distinct	Shared
Explicit	Fixed Filter	Shared Explicit
Wildcard	<i>ND</i>	Wildcard-Filter




# Reservation merging

- Reservations may be shared or merged
  - Depending on the reservation type and possible only within same type
  - router calculates the filterspec and flowspec to be sent to previous hop(s) according to reservation type




# Reservations in action - FF

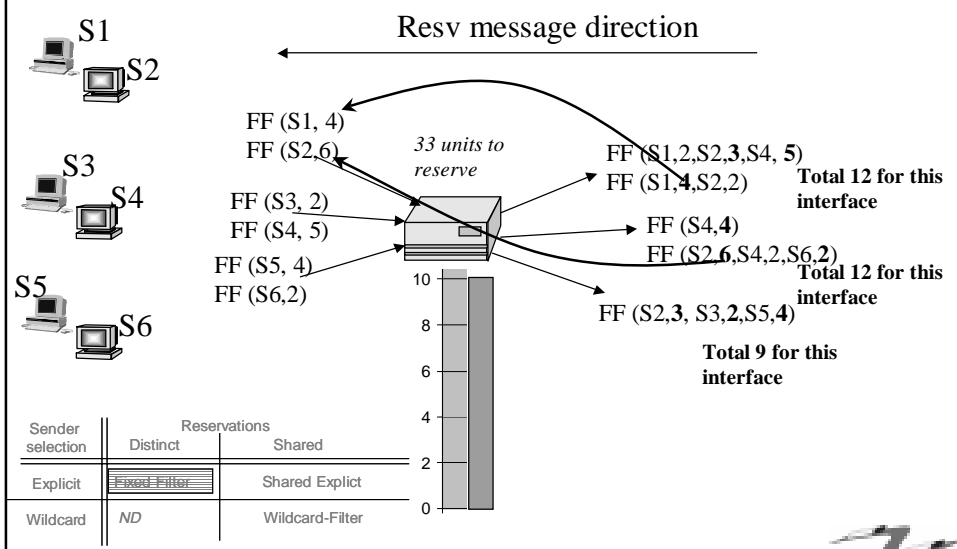





# Reservations in action – WF

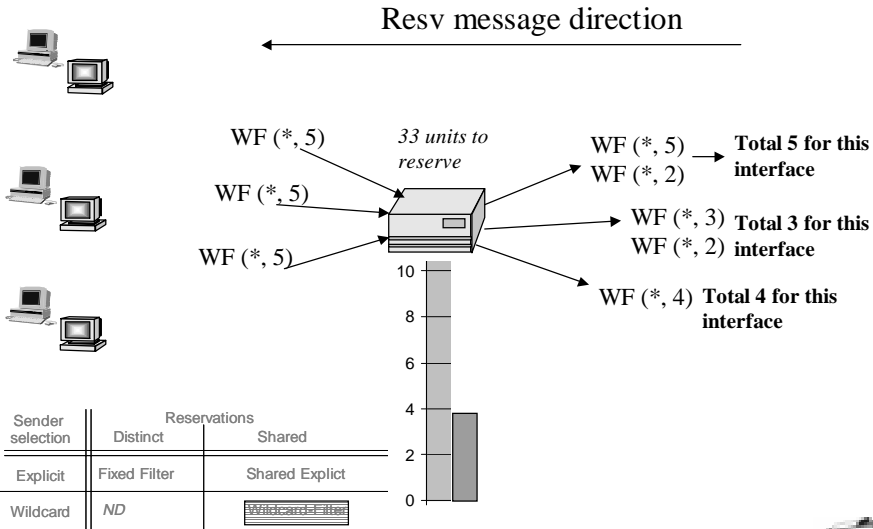

# Reservations in action - SE

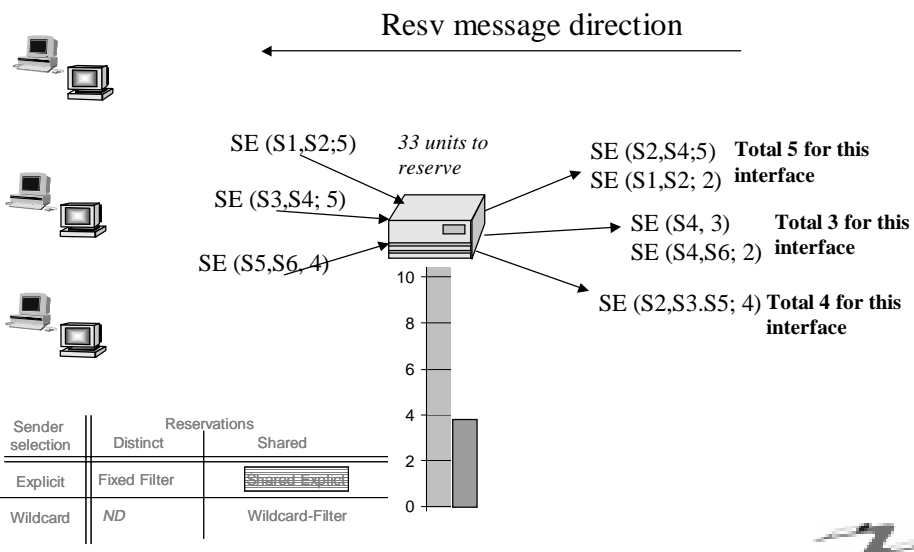



## Adspec

- optional object in the PATH-message
- Consists of
  - default general parameters
  - Guaranteed Service fragment
  - Controlled Load Service fragment
- advertise receivers the characteristics of the end-to-end **path**



## Adspec – Default general parameters

- Minimum Path Latency
- Path bandwidth
- Global break bit
  - cleared when Adspec is created by the sender
- IntServ Hop Count
- PathMTU







## Adspec – Guaranteed Service fragment

- Ctot, Dtot, Csum and Dsum
- Guaranteed Service break bit
- Guaranteed Service General Parameters
  - overrides the values in default general parameters



## Adspec – Controlled load service fragment

- Controlled-load service break bit
- Controlled-load service general parameters
  - overriding those presented in default general parameters






## OPWA

- One pass with advertise
  - Sender includes Adspec in the PATH-message
  - with the aid of Ctot and Dtot the receiver is able to determine the path characteristics and form a more accurate RESV-message
  - receiver includes R and S (the slack term) in the RESV-message Rspec
    - Rspec includes also reservation type, filter specification, flow specification with Tspec and Rspec
- Without Adspec we have OP (One pass) and the RESV-message includes only the Tspec



## Slack term

- Indicates the difference between the desired delay and the actual delay obtained with current R (bandwidth reservation)
- Allows the reservations some flexibility
  - balance between queue usage and service rate

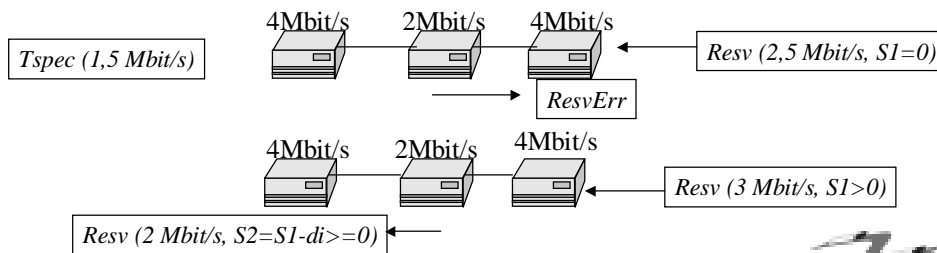



## Confused?

- PATH(Tspec) describes how the traffic will behave
  - PATH will also establish the route
- The receiver calculates (maybe based on Adspec) what kind of reservations have to be made and puts this reservation request into RESV(Rspec)
  - RESV will make the reservations on the route



## RSVP problems

- Implementation
  - RSVP is somewhat vague in its definitions and therefore difficult to implement consistently
    - RSVP API found in latest MS Windows APIs
    - compatibility between operating systems
  - For IntServ to function every node on the path must implement the IntServ functionality
    - especially true for the Guaranteed service





## Alternative uses of RSVP and future issues

- RSVP-TE
  - RSVP with traffic engineering extensions
  - Will be presented in the MPLS-lecture
- Accounting and billing need to be integrated
- Authentication issues need to be resolved



## Future of IntServ (and RSVP)

- In core there might be large amount of reservations to be update, so you have to:
  - not isolate individual flows
  - map flows into fixed number of service classes
  - don't bother RSVP messages
  - keep state on the edges
  - > DiffServ

*Integrated Services will be deployed first  
in Intranets and other local environments  
where scaling and policy control are much less challenging  
- Bob Braden-*

