Switch Fabrics

Switching Technology S38.3165 http://www.netlab.hut.fi/opetus/s383165

© P. Raatikainen

Switching Technology / 2006

L4 - 1

Switch fabrics

- Basic concepts
- Time and space switching
- Two stage switches
- Three stage switches
- Cost criteria
- Multi-stage switches and path search (cont.)

© P. Raatikainen

Switching Technology / 2006

Recursive factoring of a strict-sense non-blocking network

- A strict-sense non-blocking network can be constructed recursively, but the size of network (number of cross-points) crows fast as the function of the number of inputs, namely *CNlog₂N*
- Instead of starting with the smaller factor for p let's use switch blocks of $\sqrt{N} x \sqrt{N}$
- Let $N = 2^n$ and $n = 2^l$ then we are factoring square switches with number of inputs and outputs being power of 2
 - => condition for a strict-sense non-blocking network states that $r_2 \ge m_1 + n_3 - 1$ (Clos theorem)
 - $=> m_1 = n_3 = 2^{n/2}$
 - => there are $r_2 \ge 2x2^{n/2} 1$ second stage SBs


© P Raatikainen


Switching Technology / 2006

L4 - 3

Recursive factoring of a strict-sense non-blocking network (cont.)

- Let's choose $r_2 = 2x2^{n/2}$ then the sizes of the 1st stage switches are $2^{n/2} \times 2^{n/2+1}$ $(n_1 = r_2)$
 - 3rd stage switches are $2^{n/2+1} \times 2^{n/2}$ ($m_3 = r_2$)
- Each of these can be made of two SBs each of size 2^{n/2} x 2^{n/2}





• 2nd stage switches are of size $2^{n/2}$ x $2^{n/2}$ because $m_2 = r_1 = n_2 = r_3 = 2^{n/2}$

© P. Raatikainen

Switching Technology / 2006

Recursive factoring of a strict-sense non-blocking network (cont.)

- The three stages consist of $6x2^{n/2}$ SBs, each of size $2^{n/2}$ x $2^{n/2}$
- Let F(2ⁿ) be the cross-point complexity of an NxN switch then

```
• F(2^n) = 6x2^{n/2}F(2^{n/2})

= 6x2^{n/2}x 6x2^{n/4}F(2^{n/4})

... (Noticing that n = 2^l we get...)

= 6^lx2^{n/2+n/4+...+1}F(2^1) (When n \to \infty then n/2+n/4+...+1 = n)

< 6^lx2^nF(2)

= N(log_2N)^{2.58}F(2)

= 4N(log_2N)^{2.58}
```

 The difference between rearrangeable and strict-sense nonblocking networks lies in the exponent for the log₂N term

© P. Raatikainen

Switching Technology / 2006

L4 - 5


Strict-sense non-blocking network with smaller number of cross-points

- Strict-sense non-blocking networks with smaller number of crosspoints than $F(2^n) = 4N(\log_2 N)^{2.58}$ can be constructed
- One alternative is to use Cantor network, which is constructed using Benes networks, multiplexers and demultiplexers
 - *i*-th input of Cantor network connected to *j*-th input of *j*-th Benes network using *j*-th output of a 1x*m* demultiplexer
 - i-th output of j-th Benes network connected to i-th output of Cantor network using j-th input of a mx1 multiplexer
- When N is known, the number of required Benes planes to have a strict-sense non-blocking Cantor network is m = log₂N
- Since a Benes network has a cross-point count of 4Nlog₂N, the number of cross-points of a Cantor network is roughly 4N(log₂N)² (when ignoring cross-points of the multiplexers and demultiplexers

© P. Raatikainen

Switching Technology / 2006



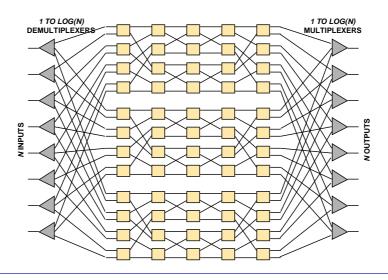

© P. Raatikainen

Switching Technology / 2006

L4 - 7

Cantor network strict-sense non-blocking

Proof:

- Markings
 - m number of parallel Benes networks
 - k number of a stage in a Benes network
 - **A(k)** number of reachable 2x2 SBs without rearrangements in stage k ($1 \le k \le log_2N$) starting from an input of a Cantor network
- Reachable 2x2 SBs in consecutive stages
 - A(1) = m
 - A(2) = 2A(1) 1
 - A(3) = 2A(2) 2
 - $A(k) = 2A(k-1) 2^{k-2} = 2^2A(k-2) 2x2^{k-2} = 2^{k-1}A(1) (k-1)x2^{k-2}$
 - $A(log_2N) = 2^{log_2N-1}m (log_2N-1) 2^{log_2N-2}$

$$= \frac{1}{2}Nm - \frac{1}{4} (\log_2 N - 1)N$$

Cantor network strict-sense non-blocking (cont.)

- Cantor network is symmetrical at the middle
 the same number of center stage nodes are reachable by an output of a Cantor network
- Total number of SBs in center stages is *Nm*/2 (*m* Benes networks)
- If the number of center stage SBs reached by an input and an output exceeds Nm/2 then there must be a SB reachable from both
- · Hence strict-sense non-blocking is achieved if


$$2\left[\frac{1}{2}Nm - \frac{1}{4}(\log_2 N - 1)N\right] > \frac{Nm}{2}$$

 $=> m > \log_2 N - 1$

Notice that a strict-sense non-blocking Cantor network is constructed of log_2N rearrangeably non-blocking Benes networks

© P. Raatikainen

Switching Technology / 2006

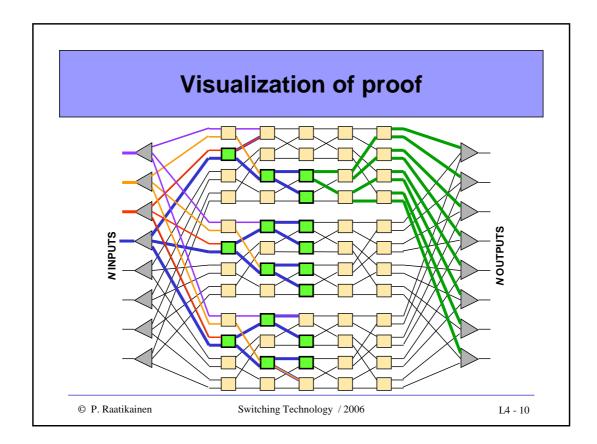

Dimensioning example of Cantor network

Number of inputs and outputs of a switching network should be $N = 32 \times 2048 = 2^{16} \approx 64\,000$

Number of multiplexers = 64 000
 Number of demultiplexers = 64 000
 Number of Benes networks m = log₂N = 16
 => number of outputs in demultiplexers = 16
 => number of inputs in multiplexers = 16

- Number of stages in Benes networks is $2log_2N 1 = 2\times16 1 = 31$
- Number of 2x2 SBs in each Benes network is [2log₂N-1] × (N/2) ≈ 31×2¹⁵
- Number of 2x2 SBs in all the m Benes networks is 31x2¹⁹

© P. Raatikainen

Switching Technology / 2006

L4 - 11

Control algorithms

- Control algorithms for networks, which are formed recursively by three stage factorization, can be applied recursively
 - works well for strict-sense non-blocking networks when setting up connections one at a time
 - for rearrangeable networks adding just one connection may cause the connection pattern to change dramatically
 adding a connection to a Benes network can be as complicated as reconnecting all input-output pairs
- Let's examine control algorithm for a Benes network, formed by factoring recursively
 - $N = 2^m$ inputs and outputs
 - start with a totally disconnected network and establish requested connection patterns

© P. Raatikainen

Switching Technology / 2006

Looping algorithm

During the first factorization of an NxN switch each 2x2 input SB may be connected to a 2x2 output SB either via upper (U) or lower (L) N/2xN/2 switch (see figure)

- 1) Initialization
 Start with 2x2 input SB1 and mark it by S
- Loop forward
 Connect an unconnected input of S to desired output by upper switch U. If no connection is required, go to 4.
- 3) Loop backward Connect the adjacent output of the output just visited to the desired input by the lower switch L. If no connection is required, go to 4. Otherwise, the newly visited input SB becomes S. Go to 2.

© P. Raatikainen


Switching Technology / 2006

L4 - 13

Looping algorithm (cont.)

4) Start new loop

Choose another SB, which has not been visited yet as S. Go to 2. If all connections for the NxN switch are made, the algorithm terminates at level m.



© P. Raatikainen

Switching Technology / 2006

Looping algorithm (cont.)

- Looping algorithm is applied recursively to establish connections for the upper switch *U* and lower switch *L*
- Computation of paths is complex and time consuming and it can be shown that the total run time of the algorithm to compute paths for all inputs and outputs is proportional to (log₂N)²
- · Looping algorithm
 - · suits for circuit switching, because connections computed per call
 - not suitable for packet switching, because connections may have to be recomputed for all N input-output pairs within duration of a packet
 - dedicating a processor for each input and output SB
 connection computations become faster, but exchange of path information between processors gets very complicated
- => Alternative switching architectures needed for packet switching


© P. Raatikainen

Switching Technology / 2006

L4 - 15


Switch fabrics

- Multi-point switching
- Self-routing networks
- Sorting networks
- Fabric implementation technologies
- Fault tolerance and reliability

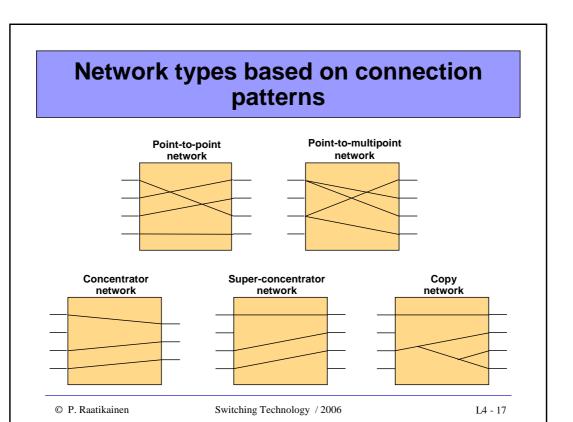

Graph presentation of connection patterns

Point-to-point switching




One-to-one connections $C = \{(i,o) | i \in I, o \in O\}$

If $(i,o) \in C$ and $(i,o') \in C => o=o'$

If $(i,o) \in C$ and $(i',o) \in C \Rightarrow i=i'$

Multi-cast switching




One-to-many connections

 $C = \{(i,n_i)| i \in I, n_i \subset O\}$

C - a logical mapping from inputs to outputs

Graph presentation of connection patterns (cont.)

Concentrator




One-to-one connections

 $C = \{(\mathbf{i}, \mathbf{o}) | \mathbf{i} \in A \subset \mathbf{I}, \mathbf{o} \in \mathbf{O}\}$ If $(\mathbf{i}, \mathbf{o}) \in C$ and $(\mathbf{i}, \mathbf{o}') \in C \Rightarrow \mathbf{o} = \mathbf{o}'$

If $(i,0) \in C$ and $(i',0) \in C => i=i'$

Super-concentrator (compact if B compact)



One-to-one connections


 $C = \{(i,o) | i \in A \subset I, o \in B \subset O\}$ If $(i,o) \in C$ and $(i,o') \in C => o = o'$ If $(i,o) \in C$ and $(i',o) \in C => i = i'$

© P. Raatikainen

Switching Technology / 2006

L4 - 19

Graph presentation of connection patterns (cont.)



One-to-many connections

 $C = \{(i,n_i) | i \in A \subset I, \sum n_i \in N\}$

Order and identity of outputs n_i ignored (output unspecific)

© P. Raatikainen

Switching Technology / 2006

Combinatorial bound

- $\zeta(G)$ is log_2 of the number of distinct and legitimate C realized by G
- ζ measures combinatorial power of a graph (G), may bear no direct relationship to control complexity of finding a switch setting to realize a connection pattern
- R is the number of cross-points in a switch fabric
- 2^R is the number of (on/off) states in a switch fabric of R cross-points => rough upper bound for the number of Cs in C is $C \le R$
- · Better upper bound obtained by removing
 - all non-legitimate states, e.g., those in which two cross-points are feeding one output
 - one of states for which another state produces the same C
- · Such improvements not easily found

© P. Raatikainen

Switching Technology / 2006

L4 - 21

Combinatorial bound (cont.)

Let us look at the number of different ${\it C}$ measured as ${\it \zeta}$ realized by different connection functions

- For each connection function, which defines a set of legitimate ${\it C}$, we may compute the logarithm of the total number of distinct ${\it C}$, marked by ${\it \zeta}$
- A graph G is rearrangeably non-blocking if all such C can be realized by G
 - => we must have $\zeta \le \zeta(G)$ for rearrangeably non-blocking G

It follows that by observing the number of distinct *C* realized by different connection functions, we can find the lower bound of complexity for any rearrangeably non-blocking fabric.

© P. Raatikainen

Switching Technology / 2006

Lower combinatorial bound for point-to-point connections

- NxN switch with full connectivity (any element in I can be connected to any distinct element in O)
- Obviously network that can realize all maximal connection patterns can realize less than maximal patterns
- Number of **C** we want to realize equals to *N*!
- · Sterling's approximation:

$$\Rightarrow$$
 N! $\approx \sqrt{2\pi} N^{N+\frac{1}{2}} e^{-N} = \sqrt{2\pi} \exp_2(N\log_2 N - N\log_2 e + \frac{1}{2}\log_2 N)$

=>
$$\zeta_{pt-pt}$$
 = log₂N! ≈ Nlog₂N - 1.44N + ½log₂N = O(NlogN)

- If 2x2 SBs are used, at least Nlog₂N such SBs are needed to realize the N! possible maximal connection patterns
- => a point-to-point interconnection network has a complexity of O(NlogN)

© P. Raatikainen

Switching Technology / 2006

L4 - 23

Visualization of point-to-point mappings

Number of connection patterns in point-to-point switching $L_c = N!$

$$N = 2 => L_c = 2$$





$$N = 3 => L_c = 6$$














Construction of C: Number inputs and mix them in an arbitrary order.

Lower bound of Benes network

- Number of 2x2 SBs in a Benes network:
 - => $2log_2N 1$ stages and each stage has N/2 SBs of size 2x2
 - => total number of 2x2 SBs is $N\log_2 N N/2$, which is close to ζ_{pt-pt}
 - => total number of cross-points 4(Nlog₂N N/2) ≈ 4Nlog₂N

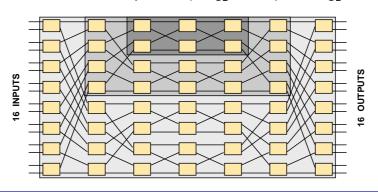

© P. Raatikainen

Switching Technology / 2006

L4 - 25

Lower combinatorial bound for multi-point connections

- Let's suppose that any input can be connected to any output, i.e., each element in *O* may choose any one of the *N* inputs
 - => total number of connection patterns C is $N^N = \exp_2(N \log_2 N)$


$$\Rightarrow \zeta_{mcast} = N log_2 N$$

$$\Rightarrow$$
 ζ_{mcast} - ζ_{pt-pt} = 1.44 N

- A fabric architecture that would implement multi-casting and would be close to the lower bound of complexity is not known yet
- It is known that Benes network implements multi-cast if the number of 2x2 SBs is doubled compared to the pt-to-pt case

Visualization of multi-cast mappings

Number of connection patterns in multi-cast switching $L_c = N^N$

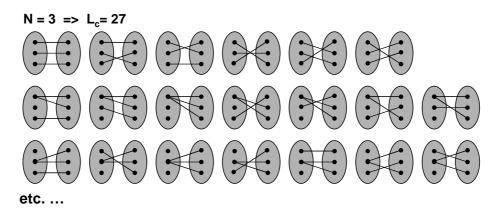

© P. Raatikainen

Switching Technology / 2006

L4 - 27

Lower combinatorial bound for concentrator

- A concentrator with *M* inputs and *N* outputs (*M*>*N*)
- Connection pattern ${\bf C}$ defined to be a set of any ${\bf N}$ of the ${\bf M}$ inputs
- Number of these sets = $\binom{M}{N} = \frac{M!}{N!(M-N)!}$
- Sterling's approximation:

$$\zeta_{concentrator} = \log_2 \frac{M!}{N!(M-N)!}$$

$$\approx \log_2 \sqrt{\frac{M}{2\pi N(M-N)}} \left(\frac{M^M}{N^N(M-N)^{M-N}} \right)$$

$$\approx MH(c)$$

1,2 1 0,8 0,6 0,4 0,2 0 0,1 0,2 0,3 0,4 0,5 0,6 0,7 0,8 0,9 1

Entropy function: $H(c) = -clog_2c - (1-c)log_2(1-c)$, c = N/M

© P. Raatikainen

Switching Technology / 2006

Lower combinatorial bound for concentrator (cont.)

- For given $C \Rightarrow \zeta_{concentrator} = O(M)$
- This lower bound is smaller by a factor of log M than that of point-to-point or multi-point networks
- Although concentrators with linear complexity (linear to number of inputs) can be shown to exist, there are no known practical solutions due to complicated control algorithms
- It can be shown that a strict-sense non-blocking concentrator is as complex as a point-to-point non-blocking concentrator - M logM
 - => *MlogM* -fabrics are used for concentration

© P. Raatikainen


Switching Technology / 2006

L4 - 29

Visualization of concentrator mappings

Number of connection patterns in concentrator $L_c = {M \choose N} = \frac{M!}{N!(M-N)!}$

Concentrator MxN = $4x2 \Rightarrow L_c = 6$



Lower combinatorial bound for super-concentrator

- A super-concentrator with *M* inputs, *N* outputs and *K* elements (*K*≤ *M*,*N*)
- Connection pattern C defined to be a legitimate set of C = (A, B) by all A and B with K elements
- Total number of these sets = $\binom{M}{K}\binom{N}{K}$

$$\zeta_{super-con} \approx M H\left(\frac{K}{M}\right) + N H\left(\frac{K}{N}\right)$$

- Super concentrators more complex than concentrators
- Compact super-concentrator specifies output set B once the starting position of the compact sequence is specified => there are N possible starting positions and hence

$$\zeta_{super-con} \approx M H \left(\frac{K}{M}\right) + log_2 N$$

© P. Raatikainen

Switching Technology / 2006


L4 - 31

Visualization of super-concentrator mappings

Number of connection patterns in super-concentrator

$$L_c = \binom{M}{K} \binom{N}{K} = \frac{M!N!}{K!(M-K)!K!(N-K)!}$$

Super concentrator M=4, N=3 and K=2 => L_c = 18

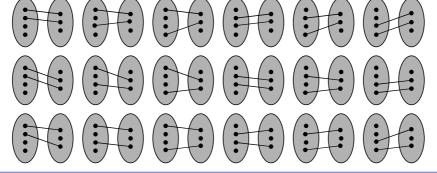

© P. Raatikainen

Switching Technology / 2006

Lower combinatorial bound for copy network

- A copy network with *M* inputs and *N* outputs
- Connection requests n_i over all inputs i is equal to N

=> Number of connection patterns **C** equals to
$$\binom{M-1+N}{M-1}$$

$$\Rightarrow \zeta_{copy} \approx (M-1+N)H\left(\frac{M-1}{M-1+N}\right)$$

Complexity lower bound is liner in **M** and **N**

© P. Raatikainen

Switching Technology / 2006


L4 - 33

Visualization of copy mappings

Number of connection patterns in copy network

$$L_c = {M-1+N \choose M-1} = \frac{(M-1+N)!}{(M-1)!N!}$$

Copy MxN =
$$4x2 \implies L_c = 10$$




 L_c is the number of ways N objects can be put into M bins.

© P. Raatikainen

Switching Technology / 2006

Compact super-concentrator example

Inverse Banyan network formed by recursive 2-stage factoring by using super-concentrators




© P. Raatikainen

Switching Technology / 2006

L4 - 35

Two stage factoring



2-stage factoring can be used to construct compact superconcentrators

© P. Raatikainen

Switching Technology / 2006

Distribution network

- Mirror image of a compact super-concentrator is called a distribution network
- Provided that an input-output connection pattern C = { (i,o_i) } satisfies:
 - Compactness condition active inputs \boldsymbol{i} for the pair in \boldsymbol{C} are compact in modulo fashion
 - **Monotone condition** outputs o_i to be connected to each active input are strictly increasing in i in modulo fashion
 - a 2-stage network can be made a non-blocking one if the connection requests arrive in sorted order one way to achieve this is to put a sorting network in front of a 2-stage network
- All point-to-point connections satisfying the above two conditions can be connected using the distribution network

© P. Raatikainen

Switching Technology / 2006


L4 - 37


Compact and monotone connection pattern

Compact active Cyclically inputs monotone outputs A modulo-wise compact set 1` 3 3 4 5 5 ŧ N-4 N-4 N-3 N-3 N-2

© P. Raatikainen

Switching Technology / 2006

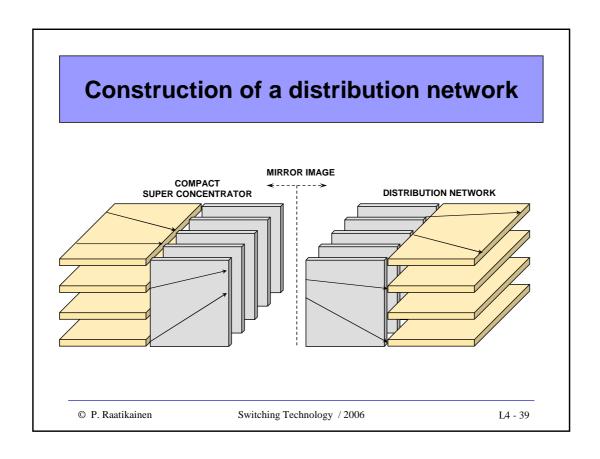

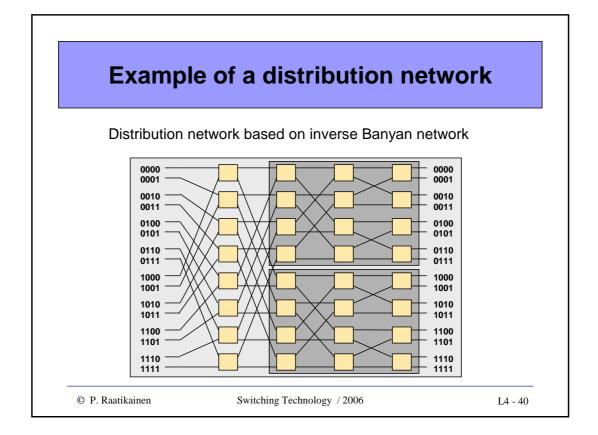

Construction of copy networks


- Distribution network, which allows multiple connections between an input and outputs, is called a copy distribution network
- An input can make extra connections to outputs if the outputs connected remain monotonically increasing with respect to the inputs
 - Compactness condition active inputs \emph{i} for the pair in $\emph{\textbf{C}}$ are compact in modulo fashion
 - **Monotone condition** each element in O_i is greater than each element in O_i if i > i' in modulo fashion
- Inverse of many-to-one concentrator performs the copy functions

© P. Raatikainen

Switching Technology / 2006

L4 - 41


Copy distribution network

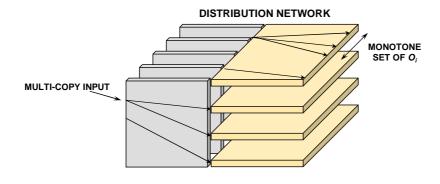

© P. Raatikainen

Switching Technology / 2006

Compact and monotone connection pattern

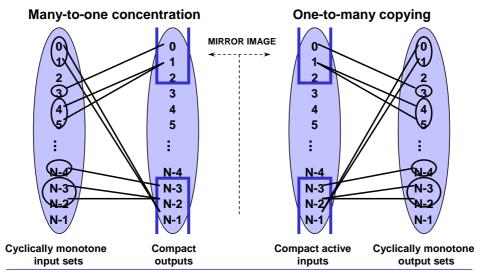

© P. Raatikainen

Switching Technology / 2006

L4 - 43

Construction of multi-cast networks

- Multi-cast networks can be constructed, e.g. by concatenating a copy network and a point-to-point network
 - 3-stage factorization can be applied to get a point-to-point network
 - resulting network consists of a concentrator, copy distribution network and Benes network
 - => number of stages increases
 - => total number of 2x2 SBs is 2Mog₂N
- There are alternative ways to construct multi-cast networks, but they encounter the above mentioned problems
 - number of stages increases
- Difficult to calculate connections through the fabric
- · Complicated fabric control algorithms
- One way to solve the control problem is to use self-routing

Switch fabrics

- Multi-point switching
- Self-routing networks
- Sorting networks
- Fabric technologies
- Fault tolerance and reliability

© P. Raatikainen

Switching Technology / 2006

L4 - 45

Self-routing

- Self-routing is a popular principle in fast packet switching
- Header of each packet contains all information needed to route a packet through a switch fabric
- One or more paths may exist from an input to an output
- Interconnection network has the unique path property if the sequence of nodes connecting an input to an output is unique for all input-output pairs
- An important class of networks having the unique property is the generic banyan network
 - MogN complexity
 - only one path connecting each input-output pair


© P. Raatikainen

Switching Technology / 2006

Banyan network

- Different permutations (mappings) have been defined between inlets and outlets of a generic NxN network that are used as the basic building blocks of self-routing networks
- Examples of commonly used permutations are
 - $\sigma_h(a_{n-1}...a_0) = a_{n-1}...a_{h+1} a_{h+1}...a_0 a_h \ (0 \le h \le n-1)$
 - $\sigma_h^{-1}(a_{n-1}...a_0) = a_{n-1}...a_{h+1} a_0 a_h...a_1(0 \le h \le n-1)$
 - $\beta_h(a_{n-1}...a_0) = a_{n-1}...a_{h+1} a_0 a_{h-1}...a_1 a_h (0 \le h \le n-1)$
 - $j(a_{n-1}...a_0) = a_{n-1}...a_0$
 - $\delta(a_{n-1}...a_0) = a_1 a_2 ... a_{n-1} a_0$
 - $\rho(a_{n-1}...a_0) = a_0 a_1...a_{n-2} a_{n-1}$

where $a = a_{n-1} ... a_0$ represents a generic address with base-2 digits a_i ($n=log_2N$)




© P. Raatikainen


Switching Technology / 2006

Examples of unique route network


Banyan network




Shuffle exchange (Omega) network



Baseline network



Flip network (inverse shuffle exchange)




© P. Raatikainen

Switching Technology / 2006

Self-routing principle

- S_1 , S_2 , ... S_K is a sequence of switch blocks, which have n_1 , n_2 , ... n_{κ} outputs respectively
- Route of a packet uses the b_k -th output of switch block k=> route given by the sequence b_1 b_2 ... b_k ... b_k
- \bullet At switch block $\textbf{\textit{k}},$ packet routed to output $\textbf{\textit{b}}_{k}$ and address $\textbf{\textit{b}}_{k}$ is removed from the self-routing header

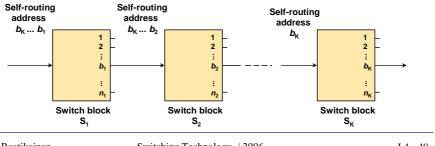

© P. Raatikainen


Switching Technology / 2006

L4 - 49

Self-routing principle (cont.)

- In a self-routing shuffle exchange (NxN) network
 - $N = 2^K$ inputs and outputs interconnected by **K** stages of 2^{K-1} nodes nodes numbered in each stage from 0 to 2^{K-1} -1 (binary **K**-1 format)

 - links (= edges) in each stage numbered from 0 to 2^{K} -1 (binary K format)
 - outgoing links numbered by appending "0" (up going links) or "1" (down going links) to the node's number




© P. Raatikainen

Switching Technology / 2006

Self-routing in a shuffle exchange network

- Self-routing shuffle exchange scheme
 - a packet at input $a_1 a_2 \dots a_K$ is destined to output $b_1 b_2 \dots b_K$
 - b_1b_2 ... b_K is used as the self-routing address (up link chosen if b_k =0 and down link if b_k =1)
 - packet visits first node $a_2...a_K =>$ travels along edge $a_2...a_K b_1 =>$ visits node $a_3...a_K b_1 =>...=>$ finally after visiting node $b_1...b_{n-1}$ arrives at output edge $b_1...b_n$

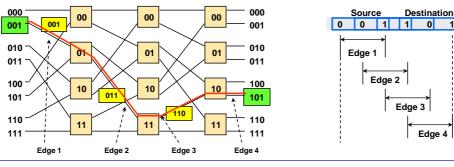

© P. Raatikainen

Switching Technology / 2006

L4 - 51

Monotone and compact addresses

- Top-down numbering of nodes and links can be used also for other self-routing networks having the unique property
- If self-routing addresses of packets at the inputs satisfy conditions:
 - addresses are strictly monotone in the sense that destination addresses are strictly increasing in top-down manner at the inputs
 - packets are **compact** in the sense that there is no idle input between any two inputs with packets
- => self-routing paths used by these packets do not share any link within the shuffle exchange network
- => no need for buffering at inputs of the internal nodes

Limitations of banyan networks


- Banyan network can realize $\exp_2(\frac{1}{2} \text{Mlog}_2 \text{N}) = (\text{N}^{\text{N}})^{\frac{1}{2}}$ input-output permutations (connection patterns)
- Full connectivity requires N! connection patterns
 - => Banyan network is a blocking one
- Combinatorial power of banyan network can be increased significantly by implementing
 - multiple links between nodes
 - duplicated switch
 - appended switch with random routing (shuffle)
 - buffering at intermediate nodes (=> undesirable random delay)

© P. Raatikainen

Switching Technology / 2006

L4 - 53

Example of a multi-cast copy network

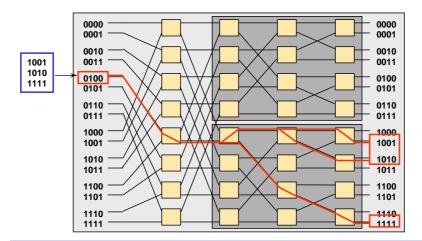

© P. Raatikainen

Switching Technology / 2006